Data Sheet

Customer:	
Product:	**Supercapacitor — SC Series**
Rated Voltage.:	**2.7V / 3.0V / 3.6V / 3.8V / 4.2V / 5.5V / 6.0V**
Issued Date:	**26-May-25**
Edition:	**REV.B1**

Pb RoHS Compliant

HONG KONG HELISTO INDUSTRIAL LIMITED
香港海利斯特实业有限公司

SHENZHEN HELISTO TECHNOLOGYCOLTD
深圳市海利斯特科技有限公司

ADD:5/F., A Block, Hongdu Industrial Park, Fanshen Road, 45 Area, Baoan, Shenzhen, China
TEL:+86-755-29741555 29749555
FAX:+86-755-29742111
E-mail:donnyhai@helisto.com
www.Helisto.com

Produced by (QC)	Checked (QC)	Approved by (QC)	Prepared by (Sales)	Accepted by (Customer)
26-May-25	26-May-25	26-May-25		
Mandy Chang	*Ben Chang*	*Ben Chang*		

Supercapacitor

■Features

■For Lithium Ion Type

－Ultra-low self-discharge, high capacity (10 times the same volume of EDLC)
－High operating voltage (3.8V); operating temperature range-40℃ ~ +70℃
－High operating voltage (4.2V); operating temperature range-40℃ ~ +65℃
－Green environmental protection，high security, reliability and maintenance-free



Coin Type



Lithium Ion Type

■For Cylindrical Type / Coin Type / Combined Type

－Low internal resistance and high power density
－Self-discharge rate is small, 72 hours self-discharge<20%
－Excellent cycle life, the coulomb efficiency is more than 95%
－Wide operating temperature ranges
－Green, meet RoHS requirements



Cylindrical Type



Combined Type

■Applications

■For Lithium Ion Type

－Internet of Things terminal GPS positioning and communication power supply，NB IOT/Pulse power supply
－Electric Tool/ETC/Quick Charge power
－Primary or backup power supply，Intelligent water、electricity and gas meter, automotive electronics, etc.

■For Cylindrical Type / Coin Type / Combined Type

－Intelligent instrument, automobile data recorder, illumination lamp, smart home, industrial control
－Fiscal cash register, digital camera, power tools, electric toy, emergency power supply
－Wireless energy saving mouse, wireless handwriting board, SSD solid state drive, medical equipment.

■Product Identification

SC	2V7	L	105	M		-1
Product Type	Rated Voltage	Shape Type	Capacitance	Capacitance Tolerance	Series Code	Special
	2V7: 2.7V 3V0: 3.0V 3V6: 3.6V 3V8: 3.8V 4V2: 4.2V 5V5: 5.5V 6V0: 6V	C: Coin & C Type H: Coin & H Type V: Coin & V Type M: Lithium Ion Type L: Cylindrical & Radial Type Z: Combined Type	104: 0.1F 105: 1F 106: 10F	M: ±20% Z: +80/-20% 9: +30/-10%	: Standard LR: Low ESR V: High Voltage H: High Temperature	

■Standard Coin Type Supercapacitor

Specifications Value of Product：Coin & C Type

Part No.	Rated Voltage (V)	Rated Capacitance (F)	Tolerance	Max ESR AC 25℃ (Ω)	Leakage Current (25℃24h, mA)	Test Current (mA)	Max. stored energy (mWh)
SC5V5C104Z	5.5	0.10	+80%/-20%	50	0.003	1.0	0.42
SC5V5C224Z	5.5	0.22	+80%/-20%	50	0.003	2.2	0.92
SC5V5C334Z	5.5	0.33	+80%/-20%	50	0.004	3.3	1.39
SC5V5C474Z	5.5	0.47	+80%/-20%	40	0.004	4.7	1.97
SC5V5C684Z	5.5	0.68	+80%/-20%	30	0.006	6.8	2.86
SC5V5C105Z	5.5	1.00	+80%/-20%	15	0.006	10	4.20
SC5V5C155Z	5.5	1.50	+80%/-20%	15	0.010	15	6.30

Specifications Value of Product：Coin & H Type

Part No.	Rated Voltage (V)	Rated Capacitance (F)	Tolerance	Max ESR AC 25℃ (Ω)	Leakage Current (25℃24h, mA)	Test Current (mA)	Max. stored energy (mWh)
SC5V5H104Z	5.5	0.10	+80%/-20%	50	0.003	1.0	0.42
SC5V5H224Z	5.5	0.22	+80%/-20%	50	0.003	2.2	0.92
SC5V5H334Z	5.5	0.33	+80%/-20%	50	0.004	3.3	1.39
SC5V5H474Z	5.5	0.47	+80%/-20%	40	0.004	4.7	1.97
SC5V5H684Z	5.5	0.68	+80%/-20%	30	0.006	6.8	2.86
SC5V5H105Z	5.5	1.00	+80%/-20%	15	0.006	10	4.20
SC5V5H155Z	5.5	1.50	+80%/-20%	15	0.010	15	6.30

Specifications Value of Product：Coin & V Type

Part No.	Rated Voltage (V)	Rated Capacitance (F)	Tolerance	Max ESR AC 25℃ (Ω)	Leakage Current (25℃24h, mA)	Test Current (mA)	Max. stored energy (mWh)
SC5V5V104Z	5.5	0.10	+80%/-20%	50	0.003	1.0	0.42
SC5V5V224Z	5.5	0.22	+80%/-20%	50	0.003	2.2	0.92
SC5V5V334Z	5.5	0.33	+80%/-20%	50	0.004	3.3	1.39
SC5V5V474Z	5.5	0.47	+80%/-20%	40	0.004	4.7	1.97
SC5V5V684Z	5.5	0.68	+80%/-20%	30	0.006	6.8	2.86
SC5V5V105Z	5.5	1.00	+80%/-20%	15	0.006	10	4.20
SC5V5V155Z	5.5	1.50	+80%/-20%	15	0.010	15	6.30

■Body color：≤0.47F Gold；＞0.47F Black

Dimensions & Packaging Quantity

Fig.1

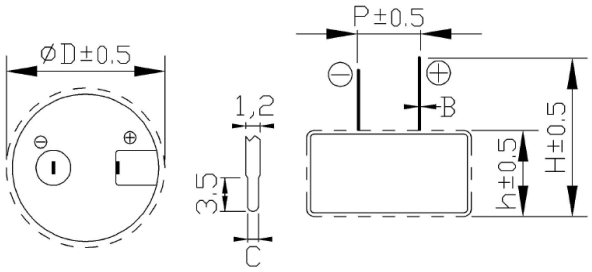


Fig.2

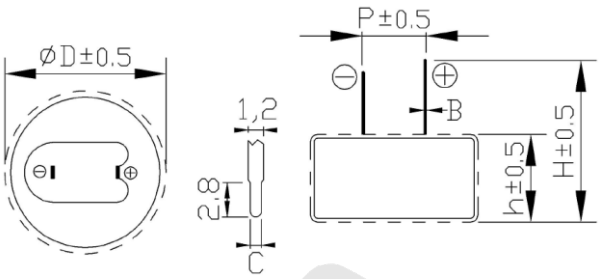


Fig.3

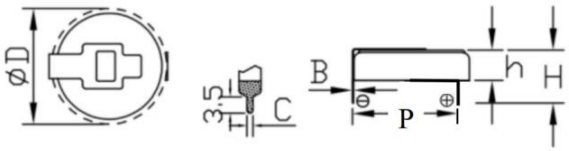


Fig.4

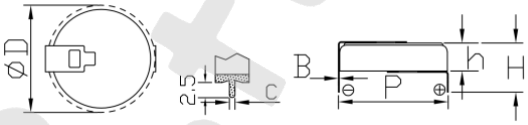


Fig.5


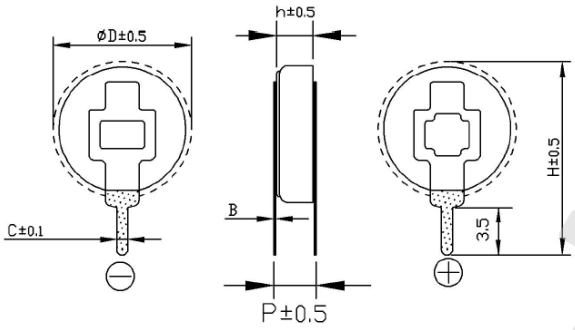


Fig.6

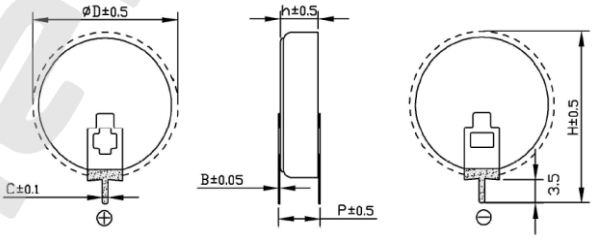

Part No.	Figure	D (mm)	P (mm)	C (mm)	h (mm)	H (mm)	B (mm)	Quantity (EA)
								Plastic Tray
SC5V5C104Z	2	13.2±0.5	5.0±0.5	0.8±0.10	7.0±0.5	13.0±1.0	0.4±0.10	117
SC5V5C224Z	2	13.2±0.5	5.0±0.5	0.8±0.10	7.0±0.5	13.0±1.0	0.4±0.10	117
SC5V5C334Z	2	13.2±0.5	5.0±0.5	0.8±0.10	7.0±0.5	13.0±1.0	0.4±0.10	117
SC5V5C474Z	2	13.2±0.5	5.0±0.5	0.8±0.10	7.0±0.5	13.0±1.0	0.4±0.10	117
SC5V5C684Z	1	21.0±0.5	5.5±0.5	0.8±0.10	7.5±0.5	12.5±1.0	0.5±0.10	70
SC5V5C105Z	1	21.0±0.5	5.5±0.5	0.8±0.10	7.5±0.5	12.5±1.0	0.5±0.10	70
SC5V5C155Z	1	21.0±0.5	5.5±0.5	0.8±0.10	7.5±0.5	12.5±1.0	0.5±0.10	70
SC5V5H104Z	3	12.0±0.5	10.0±0.5	0.8±0.10	4.8±0.5	10.0±1.0	0.20±0.05	168
SC5V5H224Z	3	12.0±0.5	10.0±0.5	0.8±0.10	4.8±0.5	10.0±1.0	0.20±0.05	168
SC5V5H334Z	3	12.0±0.5	10.0±0.5	0.8±0.10	4.8±0.5	10.0±1.0	0.20±0.05	168
SC5V5H474Z	3	12.0±0.5	10.0±0.5	0.8±0.10	4.8±0.5	10.0±1.0	0.20±0.05	168
SC5V5H684Z	4	19.2±0.5	19.5±0.5	1.0±0.10	4.8±0.5	9.5±1.0	0.20±0.05	70
SC5V5H105Z	4	19.2±0.5	19.5±0.5	1.0±0.10	4.8±0.5	9.5±1.0	0.20±0.05	70
SC5V5H155Z	4	19.2±0.5	19.5±0.5	1.0±0.10	4.8±0.5	9.5±1.0	0.20±0.05	70
SC5V5V104Z	5	12.0±0.5	5.0±0.5	0.8±0.10	4.8±0.5	16.2±0.5	0.20±0.05	196
SC5V5V224Z	5	12.0±0.5	5.0±0.5	0.8±0.10	4.8±0.5	16.2±0.5	0.20±0.05	196
SC5V5V334Z	5	12.0±0.5	5.0±0.5	0.8±0.10	4.8±0.5	16.2±0.5	0.20±0.05	196
SC5V5V474Z	5	12.0±0.5	5.0±0.5	0.8±0.10	4.8±0.5	16.2±0.5	0.20±0.05	196
SC5V5V684Z	6	19.2±0.5	5.0±0.5	1.0±0.10	4.8±0.5	24.0±0.5	0.20±0.05	70
SC5V5V105Z	6	19.2±0.5	5.0±0.5	1.0±0.10	4.8±0.5	24.0±0.5	0.20±0.05	70
SC5V5V155Z	6	19.2±0.5	5.0±0.5	1.0±0.10	4.8±0.5	24.0±0.5	0.20±0.05	70

■Environmental Characteristics

Item	Requirement		Test Condition
Operating Temperature Range	-25°C ~+70°C		
Rated Operating Voltage	5.5V DC		
High temperature characteristics	△C	Less than or equal to 30% of the initial value	Place in the higher operating temperature environment for 16h and test in this environment.
	ESR	Less than or equal to the specified value	
	Appearance	No leakage or mechanical damage	
Low temperature characteristics	△C	Less than or equal to 30% of the initial value	Place in the lower operating temperature environment for 2h and test in this environment.
	ESR	Less than or equal to 4 times the initial value	
	Appearance	No leakage or mechanical damage	
Endurance	△C	Less than or equal to 30% of the initial value	Applied voltage：5.0V Temperature：+70±2°C Time：1000h
	ESR	Less than or equal to 4 times the initial value	
	Appearance	No leakage or mechanical damage	
Cycle life	△C	Less than or equal to 30% of the initial value	Capacitors cycles 500000 times between rated voltage and half rated voltage under constant current at 25°C . Shelf for 5s between each charge and discharge.
	ESR	Less than or equal to 4 times the initial value	
Humidity Characteristics	△C	Satisfies the range of 30% of the initial rating	Temperature：+40±2°C Relative humidity：90~95%RH Test time：240h
	ESR	Less than or equal to 4 times the initial value	
	Appearance	No leakage or mechanical damage	
Temperature cycle	△C	Less than or equal to 10% of the initial value	Temperature cycle：-25±2°C →normal temperature →+70±2°C→normal temperature Cycles：5
	Appearance	No mechanical damage or leakage	
Low temperature storage characteristics	△C	Less than or equal to 30% of the initial value	Applied voltage：0V Temperature：-25±2°C Time：96h
	ESR	Less than or equal to 4 times the initial value	
	Appearance	No leakage or mechanical damage	
High temperature storage characteristics	△C	Less than or equal to 30% of the initial value	Applied voltage：0V Temperature：+70±2°C Time：96h
	ESR	Less than or equal to 4 times the initial value	
	Appearance	No leakage or mechanical damage	
Self discharge characteristics	The self-discharge cut-off voltage is greater than or equal to 80% of the rated voltage		Charging process: normal temperature, no load, rated voltage charge 8h Placement process: temperature less than or equal to 25 ℃, relative humidity less than 60% RH, open 24 h
Lead strength	No damage to the outlet		DL/T 1652-2016
Solder ability	More than 3/4 of the terminal surface is covered by a tin layer		DL/T 1652-2016

■Storage Temperature: -30~50℃; Relative Humidity:<60%RH

■Shelf life: 1 years Max

■High Temperature Coin Type Supercapacitor

Specifications Value of Product：Coin & C Type (3.6V)

Part No.	Rated Voltage (V)	Rated Capacitance (F)	Tolerance	Max ESR AC 25℃ (Ω)	Leakage Current (25℃24h, mA)	Test Current (mA)	Max. stored energy (mWh)
SC3V6C224ZH	3.6	0.22	+80%/-20%	50	0.003	2.2	0.40

Specifications Value of Product：Coin & C Type (5.5V)

Part No.	Rated Voltage (V)	Rated Capacitance (F)	Tolerance	Max ESR AC 25℃ (Ω)	Leakage Current (25℃24h, mA)	Test Current (mA)	Max. stored energy (mWh)
SC5V5C104ZH	5.5	0.10	+80%/-20%	50	0.003	1.0	0.42
SC5V5C224ZH	5.5	0.22	+80%/-20%	50	0.003	2.2	0.92
SC5V5C334ZH	5.5	0.33	+80%/-20%	50	0.004	3.3	1.39
SC5V5C474ZH	5.5	0.47	+80%/-20%	50	0.004	4.7	1.97
SC5V5C684ZH	5.5	0.68	+80%/-20%	30	0.006	6.8	2.86
SC5V5C105ZH	5.5	1.00	+80%/-20%	15	0.006	10	4.20
SC5V5C155ZH	5.5	1.50	+80%/-20%	15	0.010	15	6.30

Specifications Value of Product：Coin & H Type (3.6V)

Part No.	Rated Voltage (V)	Rated Capacitance (F)	Tolerance	Max ESR AC 25℃ (Ω)	Leakage Current (25℃24h, mA)	Test Current (mA)	Max. stored energy (mWh)
SC3V6H224ZH	3.6	0.22	+80%/-20%	50	0.003	2.2	0.40
SC3V6H105ZH	3.6	1.00	+80%/-20%	15	0.006	10.0	1.80
SC3V6H155ZH	3.6	1.50	+80%/-20%	15	0.010	10.0	2.70

Specifications Value of Product：Coin & H Type (5.5V)

Part No.	Rated Voltage (V)	Rated Capacitance (F)	Tolerance	Max ESR AC 25℃ (Ω)	Leakage Current (25℃24h, mA)	Test Current (mA)	Max. stored energy (mWh)
SC5V5H104ZH	5.5	0.10	+80%/-20%	50	0.003	1.0	0.42
SC5V5H224ZH	5.5	0.22	+80%/-20%	50	0.003	2.2	0.92
SC5V5H334ZH	5.5	0.33	+80%/-20%	50	0.004	3.3	1.39
SC5V5H474ZH	5.5	0.47	+80%/-20%	50	0.004	4.7	1.97
SC5V5H684ZH	5.5	0.68	+80%/-20%	30	0.006	6.8	2.86
SC5V5H105ZH	5.5	1.00	+80%/-20%	15	0.006	10	4.20
SC5V5H155ZH	5.5	1.50	+80%/-20%	15	0.010	15	6.30

Specifications Value of Product：Coin & V Type (3.6V)

Part No.	Rated Voltage (V)	Rated Capacitance (F)	Tolerance	Max ESR AC 25℃ (Ω)	Leakage Current (25℃24h, mA)	Test Current (mA)	Max. stored energy (mWh)
SC3V6V224ZH	3.6	0.22	+80%/-20%	50	0.003	2.2	0.40
SC3V6V105ZH	3.6	1.00	+80%/-20%	15	0.006	10.0	1.80

Specifications Value of Product：Coin & V Type (5.5V)

Part No.	Rated Voltage (V)	Rated Capacitance (F)	Tolerance	Max ESR AC 25℃ (Ω)	Leakage Current (25℃24h, mA)	Test Current (mA)	Max. stored energy (mWh)
SC5V5V104ZH	5.5	0.10	+80%/-20%	50	0.003	1.0	0.42
SC5V5V224ZH	5.5	0.22	+80%/-20%	50	0.003	2.2	0.92
SC5V5V334ZH	5.5	0.33	+80%/-20%	50	0.004	3.3	1.39
SC5V5V474ZH	5.5	0.47	+80%/-20%	50	0.004	4.7	1.97
SC5V5V684ZH	5.5	0.68	+80%/-20%	30	0.006	6.8	2.86
SC5V5V105ZH	5.5	1.00	+80%/-20%	15	0.006	10	4.20
SC5V5V155ZH	5.5	1.50	+80%/-20%	15	0.010	15	6.30

■Body color：≤0.47F Gold；＞0.47F Black

Supercapacitor

Dimensions & Packaging Quantity

Fig.1

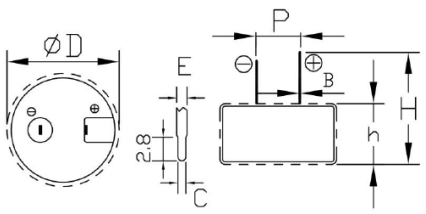


Fig.2

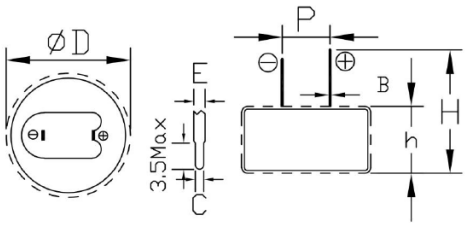


Fig.3

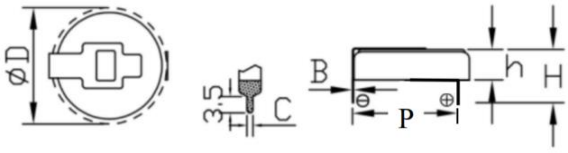


Fig.4

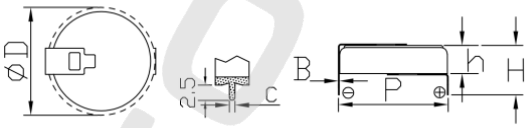


Fig.5


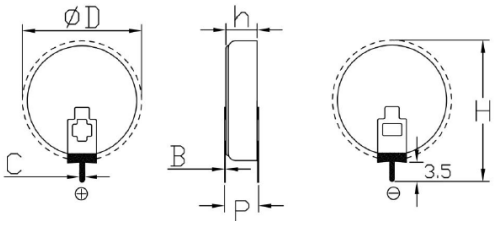


Fig.6

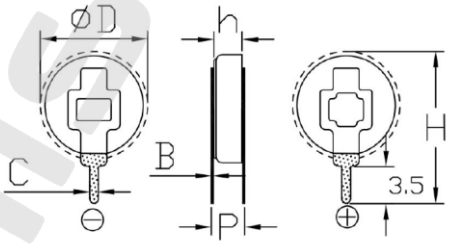

Part No.	Figure	D (mm)	P (mm)	C (mm)	h (mm)	H (mm)	B (mm)	E (mm)	Quantity (EA)
									Plastic Tray
SC3V6C224ZH	2	13.2±0.5	5.0±0.5	0.8±0.10	7.0±0.5	13.0±1.0	0.40±0.10	-	117
SC5V5C104ZH	2	13.2±0.5	5.0±0.5	0.8±0.10	7.0±0.5	13.0±1.0	0.40±0.10	1.0±0.2	117
SC5V5C224ZH	2	13.2±0.5	5.0±0.5	0.8±0.10	7.0±0.5	13.0±1.0	0.40±0.10	1.0±0.2	117
SC5V5C334ZH	2	13.2±0.5	5.0±0.5	0.8±0.10	7.0±0.5	13.0±1.0	0.40±0.10	1.0±0.2	117
SC5V5C474ZH	2	13.2±0.5	5.0±0.5	0.9±0.15	7.0±0.5	13.0±0.5	0.40±0.10	1.0±0.2	117
SC5V5C684ZH	1	21.0±0.5	5.5±0.5	0.8±0.10	7.5±0.5	12.5±1.0	0.50±0.10	1.1±0.2	70
SC5V5C105ZH	1	21.0±0.5	5.5±0.5	0.8±0.10	7.5±0.5	12.5±1.0	0.50±0.10	1.1±0.2	70
SC5V5C155ZH	1	21.0±0.5	5.5±0.5	0.8±0.10	7.5±0.5	12.5±1.0	0.50±0.10	1.1±0.2	70
SC3V6H224ZH	3	12.0±0.5	10.0±0.5	0.8±0.10	4.8±0.5	10.0±1.0	0.20±0.05	-	117
SC3V6H105ZH	4	19.2±0.5	19.5±0.5	1.0±0.10	4.8±0.5	9.5±1.0	0.20±0.05	-	70
SC3V6H155ZH	4	19.2±0.5	19.5±0.5	1.0±0.10	4.8±0.5	9.5±1.0	0.20±0.05	-	70
SC5V5H104ZH	3	12.0±0.5	10.0±0.5	0.8±0.10	4.8±0.5	10.0±1.0	0.20±0.05	-	168
SC5V5H224ZH	3	12.0±0.5	10.0±0.5	0.8±0.10	4.8±0.5	10.0±1.0	0.20±0.05	-	168
SC5V5H334ZH	3	12.0±0.5	10.0±0.5	0.8±0.10	4.8±0.5	10.0±1.0	0.20±0.05	-	168
SC5V5H474ZH	3	12.0±0.5	10.0±0.5	0.8±0.10	4.8±0.5	10.0±1.0	0.20±0.05	-	168
SC5V5H684ZH	4	19.2±0.5	19.5±0.5	1.0±0.10	4.8±0.5	9.5±1.0	0.20±0.05	-	70
SC5V5H105ZH	4	19.2±0.5	19.5±0.5	1.0±0.10	4.8±0.5	9.5±1.0	0.20±0.05	-	70
SC5V5H155ZH	4	19.2±0.5	19.5±0.5	1.0±0.10	4.8±0.5	9.5±1.0	0.20±0.05	-	70
SC3V6V224ZH	6	12.0±0.5	5.0±0.5	0.8±0.10	4.8±0.5	16.2±0.5	0.20±0.05	-	196
SC3V6V105ZH	5	19.2±0.5	5.0±0.5	1.0±0.10	4.8±0.5	24.0±0.5	0.20±0.05	-	70
SC5V5V104ZH	6	12.0±0.5	5.0±0.5	0.8±0.10	4.8±0.5	16.2±0.5	0.20±0.05	-	196
SC5V5V224ZH	6	12.0±0.5	5.0±0.5	0.8±0.10	4.8±0.5	16.2±0.5	0.20±0.05	-	196
SC5V5V334ZH	6	12.0±0.5	5.0±0.5	0.8±0.10	4.8±0.5	16.2±0.5	0.20±0.05	-	196
SC5V5V474ZH	6	12.0±0.5	5.0±0.5	0.8±0.10	4.8±0.5	16.2±0.5	0.20±0.05	-	196
SC5V5V684ZH	5	19.2±0.5	5.0±0.5	1.0±0.10	4.8±0.5	24.0±0.5	0.20±0.05	-	70
SC5V5V105ZH	5	19.2±0.5	5.0±0.5	1.0±0.10	4.8±0.5	24.0±0.5	0.20±0.05	-	70
SC5V5V155ZH	5	19.2±0.5	5.0±0.5	1.0±0.10	4.8±0.5	24.0±0.5	0.20±0.05	-	70

■Environmental Characteristics

Item	Requirement		Test Condition
Operating Temperature Range	-40°C ~+85°C		
Rated Operating Voltage	3.6V DC , 5.5V DC		
High Temperature Characteristics	△C	Less than or equal to 30% of the initial value	Place in the higher operating temperature environment for 16h and test in this environment.
	ESR	Less than or equal to the initial value	
	Appearance	No leakage or mechanical damage	
Low Temperature Characteristics	△C	Less than or equal to 50% of the initial value	Place in the lower operating temperature environment for 2h and test in this environment.
	ESR	Less than or equal to 7 times the initial value	
	Appearance	No leakage or mechanical damage	
Endurance (for 5.5V)	△C	Less than or equal to 30% of the initial value	Applied voltage：5V Temperature：+85±2°C Time：1000h
	ESR	Less than or equal to 4 times the initial value	
	Appearance	No leakage or mechanical damage	
Endurance (for 3.6V)	△C	Less than or equal to 30% of the initial value	Applied voltage：3.6V Temperature：+85±2°C Time：1000h
	ESR	Less than or equal to 4 times the initial value	
	Appearance	No leakage or mechanical damage	
Cycle life	△C	Less than or equal to 30% of the initial value	Capacitors cycles 500000 times between rated voltage and half rated voltage under constant current at 25°C . Shelf for 5s between each charge and discharge.
	ESR	Less than or equal to 4 times the initial value	
Humidity Characteristics	△C	Satisfies the range of 30% of the initial rating	Temperature：+40±2°C Relative humidity：90~95%RH Test time：240h
	ESR	Less than or equal to 4 times the initial value	
	Appearance	No leakage or mechanical damage	
Temperature cycle	△C	Less than or equal to 10% of the initial value	Temperature cycle:-40±2°C → normal Temperature →+85±2°C→ normal temperature Cycles：5
	Appearance	No mechanical damage or leakage	
Low temperature storage characteristics	△C	Less than or equal to 30% of the initial value	Applied voltage：0V Temperature：-40±2°C Time：96h
	ESR	Less than or equal to 4 times the initial value	
	Appearance	No leakage or mechanical damage	
High temperature storage characteristics	△C	Less than or equal to 30% of the initial value	Applied voltage：0V Temperature：+85±2°C Time：96h
	ESR	Less than or equal to 4 times the initial value	
	Appearance	No leakage or mechanical damage	
Self discharge characteristics	The self-discharge cut-off voltage is greater than or equal to 80% of the rated voltage		Charging process: normal temperature, no load, rated voltage charge 8h Placement process: temperature less than or equal to 25°C, relative humidity less than 60% RH, open 24 h
Lead strength	No damage to the outlet		DL/T 1652-2016
Solder ability	More than 3/4 of the terminal surface is covered by a tin layer		DL/T 1652-2016

■Storage Temperature: -30~50℃; Relative Humidity:<60%RH

■Shelf life: 1 years Max

■Lithium Ion Type Supercapacitor


Specifications Value of Standard Product

Part No.	Rated Voltage (V)	Rated Capacitance (F)	Tolerance	MAX ESR AC,@1KHz (mΩ)	Max Discharge Current (A)	Pulse Current (<1s, A)	Store energy (mWh)	Sizs DxL (mm)
SC3V8M206Z	3.8	20	+80%/-20%	500	0.10	0.8	40.11	8.0x13.0
SC3V8M306Z	3.8	30	+80%/-20%	250	0.20	2.0	60.17	8.0x20.0
SC3V8M306Z-1	3.8	30	+80%/-20%	250	0.15	1.0	60.17	10.0x13.5
SC3V8M406Z	3.8	40	+80%/-20%	200	0.20	2.0	80.22	8.0x20.0
SC3V8M406Z-1	3.8	40	+80%/-20%	200	0.20	2.0	80.22	10.0x13.5
SC3V8M506Z	3.8	50	+80%/-20%	250	0.20	2.5	100.28	8.0x25.0
SC3V8M706Z	3.8	70	+80%/-20%	175	0.25	2.5	140.39	12.5x13.0
SC3V8M706Z-1	3.8	70	+80%/-20%	250	0.50	2.5	140.39	8.0x25.0
SC3V8M806Z	3.8	80	+80%/-20%	150	0.25	3.5	160.44	10.0x20.0
SC3V8M127Z-1	3.8	120	+80%/-20%	100	3.00	-	240.67	12.5x20.0
SC3V8M127Z-2	3.8	120	+80%/-20%	100	0.50	6.0	240.67	10.0x30.0
SC3V8M127Z-3	3.8	120	+80%/-20%	100	0.50	5.0	240.67	12.5x20.0
SC3V8M257Z	3.8	250	+80%/-20%	50	0.80	9.0	501.39	12.5x35.0
SC3V8M257Z-1	3.8	250	+80%/-20%	50	1.00	7.0	501.39	16.0x21.0
SC3V8M307Z	3.8	300	+80%/-20%	50	1.00	10	601.67	12.5x40.0
SC3V8M507Z	3.8	500	+80%/-20%	40	2.00	16	1002.78	16.0x41.0
SC3V8M757Z	3.8	750	+80%/-20%	35	3.00	16	1504.17	18.0x41.0
SC3V8M108Z	3.8	1000	+80%/-20%	35	6.00	20	2005.56	18.0x41.0

■**Body color：Green**

■**Test current I(mA)=5xC_Rx (U_R-U_{min})/3.6**

Dimensions & Packaging Quantity

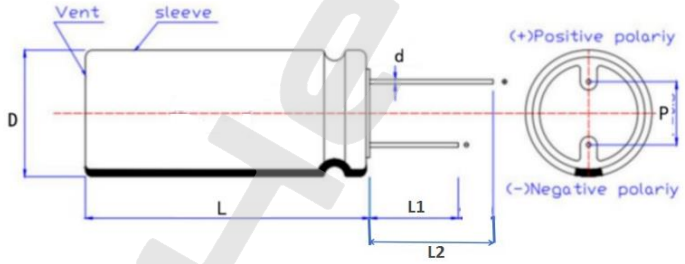

Part No.	D (mm)	L (mm)	P (mm)	d (mm)	L1 (mm)	L2 (mm)	Quantity (EA)
							Plastic Tray
SC3V8M206Z	8±1.5	13±1.5	3.5±0.5	0.6±0.1	22.5±1.5	28.5±1.5	50
SC3V8M306Z	8±1.5	20±1.5	3.5±0.5	0.6±0.1	21.0±1.5	27.0±1.5	50
SC3V8M306Z-1	10±1.5	13.5±1.5	5.0±0.5	0.6±0.1	23.0±1.5	28.5±1.5	50
SC3V8M406Z	8±1.5	20±1.5	3.5±0.5	0.6±0.1	21.0±1.5	27.0±1.5	50
SC3V8M406Z-1	10±1.5	13.5±1.5	5.0±0.5	0.6±0.1	23.0±1.5	28.5±1.5	50
SC3V8M506Z	8±1.5	25±1.5	3.5±0.5	0.6±0.1	20.0±1.5	26.0±1.5	60
SC3V8M706Z	12.5±1.5	13±1.5	5.0±0.5	0.6±0.1	23.0±1.5	29.0±1.5	50
SC3V8M706Z-1	8±1.5	25±1.5	3.5±0.5	0.6±0.1	20.0±1.5	26.0±1.5	60
SC3V8M806Z	10±1.5	20±1.5	5.0±0.5	0.6±0.1	21.0±1.5	27.0±1.5	40
SC3V8M127Z-1	12.5±0.5	20±1.5	5.0±0.5	0.6±0.1	20.5±1.5	26.5±1.5	60
SC3V8M127Z-2	10±1.5	30±1.5	5.0±0.5	0.6±0.1	20.0±1.5	26.0±1.5	40
SC3V8M127Z-3	12.5±1.5	20±1.5	5.0±0.5	0.6±0.1	20.5±1.5	26.5±1.5	60
SC3V8M257Z	12.5±1.5	35±1.5	5.0±0.5	0.6±0.1	20.5±1.5	27.0±1.5	40
SC3V8M257Z-1	16.0±1.5	21±1.5	7.5±0.5	0.8±0.1	22.5±1.5	25.5±1.5	60
SC3V8M307Z	12.5±1.5	40±1.5	5.0±0.5	0.6±0.1	20.0±1.5	26.5±1.5	40
SC3V8M507Z	16.0±1.5	41±1.5	7.5±0.5	0.8±0.1	24.0±1.5	28.5±1.5	40
SC3V8M757Z	18.0±1.5	41±1.5	7.5±0.5	0.8±0.1	25.0±1.5	27.5±1.5	40
SC3V8M108Z	18.0±1.5	41±1.5	7.5±0.5	0.8±0.1	25.0±1.5	27.5±1.5	40

■Environmental Characteristics

Item	Requirement	Test Condition
Operating Temperature Range	-40°C ~+70°C	
Minimum Voltage	2.5V	
Capacitance Tolerance	+80% ~ -20%	
Optimum storage condition	-10°C ~ 50°C, ≦65%RH	
Cycle life	≥100000 times	Capacitors charge/discharge 100000 times between 3.0V and 3.8V under constant current at 25°C
	Capacity Change≦ 30% of the initial value ESR is less than 4 times of the specified value..	
Low Temperature Characteristics	Capacitiy Change ≤50% of the value at 25°C. ESR is less than 20 times of the specified value	Tmin±2℃, 2h
High Temperature Characteristics	Capacitiy Change ≤30% of the value at 25°C. ESR is less than 2 times of the value at 25°C.	Tmax±2℃, 16h
High Temperature Load Life	Capacity Change≦ 30% of the initial value. ESR is less than 4 times of the specified value. Appearance no remarkable defects.	1000h, 55±2℃ @U_R
High Temperature Storage	Capacity Change≦ 30% of the initial value. ESR is less than 2 times of the specified value.	1000h, Tmax±2℃, 3.6V, No charging
Humidity Characteristics	Capacity Change≦ 30% of the initial value. ESR is less than 2 times of the specified value.	240h, 40℃, 90±2%RH

■Storage Temperature: -30~50℃; Relative Humidity:<60%RH

■Shelf life: 1 years Max

■Lithium Ion Type Supercapacitor


Specifications Value of Standard Product

Part No.	Rated Voltage (V)	Rated Capacitance (F)	Tolerance	MAX ESR AC,@1KHz (mΩ)	Max Discharge Current (A)	Pulse Current (<1s, A)	Store energy (mWh)	Sizs DxL (mm)
SC4V2M906Z	4.2	90	+80%/-20%	250	0.5	2.5	220.5	8.0x25.0
SC4V2M197Z	4.2	190	+80%/-20%	100	0.9	5.0	465.5	10.0x30.0
SC4V2M257Z	4.2	250	+80%/-20%	100	1.2	6.0	512.5	12.5x20.0
SC4V2M307Z	4.2	300	+80%/-20%	90	2.0	10	735.0	12.5x30.0
SC4V2M407Z	4.2	400	+80%/-20%	80	2.0	10	980.0	16.0x21.0
SC4V2M557Z	4.2	550	+80%/-20%	80	3.0	15	1347.0	12.5x40.0
SC4V2M807Z	4.2	800	+80%/-20%	60	4.0	15	1960.0	16.0x41.0
SC4V2M108Z	4.2	1000	+80%/-20%	35	6.0	20	2450.0	18.0x40.0

■**Body color：Green**

■**Test current I(mA)=5xC_Rx (U_R-U_{min})/3.6**

Dimensions & Packaging Quantity

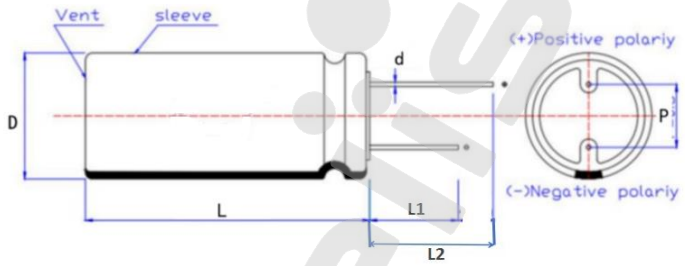

Part No.	D (mm)	L (mm)	P (mm)	d (mm)	L1 (mm)	L2 (mm)	Quantity (EA)
							Plastic Tray
SC4V2M906Z	8±1.5	25.0±1.5	3.5±0.5	0.6±0.1	20.0±1.5	26.0±1.5	60
SC4V2M197Z	10±1.5	30±1.5	5.0±0.5	0.6±0.1	20.5±1.5	26.5±1.5	40
SC4V2M257Z	12.5±1.5	20.0±1.5	5.0±0.5	0.6±0.1	20.5±1.5	26.5±1.5	60
SC4V2M307Z	12.5±1.5	30.0±1.5	5.0±0.5	0.6±0.1	20.5±1.5	26.5±1.5	40
SC4V2M407Z	16.0±1.5	21.0±1.5	7.5±0.5	0.8±0.1	22.5±1.5	25.5±1.5	60
SC4V2M557Z	12.5±1.5	40.0±1.5	5.0±0.5	0.6±0.1	20.0±1.5	26.5±1.5	40
SC4V2M807Z	16.0±1.5	41.0±1.5	7.5±0.5	0.8±0.1	24.0±1.5	28.5±1.5	40
SC4V2M108Z	18.0±1.5	41.0±1.5	7.5±0.5	0.8±0.1	25.0±1.5	27.5±1.5	40

■Environmental Characteristics

Item	Requirement	Test Condition
Operating Temperature Range	-40°C ~+65°C	
Minimum Voltage	2.5V	
Capacitance Tolerance	+80% ~ -20%	
Optimum storage condition	-10°C ~ 50°C, ≦65%RH	
Cycle life	≥100000 times	Capacitors charge/discharge 100000 times between 3.0V and 4.2V under constant current at 25°C
	Capacity Change≦ 30% of the initial value ESR is less than 4 times of the specified value..	
Low Temperature Characteristics	Capacitiy Change ≤50% of the value at 25°C. ESR is less than 20 times of the specified value	Tmin±2℃, 16h
High Temperature Characteristics	Capacitiy Change ≤30% of the value at 25°C. ESR is less than 2 times of the value at 25°C.	Tmax±2℃, 16h
High Temperature Load Life	Capacity Change≦ 30% of the initial value. ESR is less than 4 times of the specified value. Appearance no remarkable defects.	1000h, 55±2℃ @U_R
High Temperature Storage	Capacity Change≦ 30% of the initial value. ESR is less than 2 times of the specified value.	1000h, Tmax±2℃, 4.0V, No charging
Humidity Characteristics	Capacity Change≦ 30% of the initial value. ESR is less than 2 times of the specified value.	240h, 40℃, 90±2%RH

■Storage Temperature: -30~50℃; Relative Humidity:<60%RH

■Shelf life: 1 years Max

■Standard Cylindrical Type Supercapacitor


Specifications Value of Standard Product：Cylindrical & Radial Type

Part No.	Rated Voltage (V)	Rated Capacitance (F)	Tolerance	Max. ESR 25℃ (mΩ)	Maximum Peak Current (25℃ <1s, A)	Leakage Current (25℃ 72h, mA)	Store energy (mWh)	Sizs DxL (mm)
SC2V7L504M	2.7	0.5	±20%	500	0.54	0.008	0.51	6.3x12.5
SC2V7L105M	2.7	1	±20%	500	0.90	0.008	1.01	6.3x12.5
SC2V7L105M-1	2.7	1	±20%	350	1.00	0.008	1.01	8.0x13.0
SC2V7L155M	2.7	1.5	±20%	500	1.16	0.008	1.52	6.3x12.5
SC2V7L155M-1	2.7	1.5	±20%	350	1.33	0.010	1.52	8.0x13.0
SC2V7L205M	2.7	2	±20%	200	1.99	0.012	2.03	8.0x16.0
SC2V7L205M-1	2.7	2	±20%	240	1.93	0.012	2.03	8.0x13.0
SC2V7L305M	2.7	3	±20%	160	2.98	0.017	3.04	8.0x20.0
SC2V7L335M	2.7	3.3	±20%	160	3.19	0.017	3.34	8.0x20.0
SC2V7L505M	2.7	5	±20%	120	4.82	0.020	5.06	8.0x24.0
SC2V7L505M-1	2.7	5	±20%	120	4.91	0.020	5.06	10.0x20.0
SC2V7L605M	2.7	6	±20%	100	5.59	0.025	6.08	10.0x20.0
SC2V7L705M	2.7	7	±20%	80	6.34	0.030	7.09	10.0x20.0
SC2V7L106M	2.7	10	±20%	65	8.18	0.050	10.13	10.0x25.0
SC2V7L106M-1	2.7	10	±20%	70	7.94	0.050	10.13	12.5x20.0
SC2V7L126M	2.7	12	±20%	65	9.01	0.050	12.15	12.5x20.0
SC2V7L156M	2.7	15	±20%	55	11.10	0.065	15.19	12.5x25.0
SC2V7L206M	2.7	20	±20%	50	14.21	0.080	20.25	12.5x25.0
SC2V7L256M	2.7	25	±20%	45	19.29	0.070	25.31	16.0x25.0
SC2V7L306M	2.7	30	±20%	30	21.32	0.078	30.38	16.0x30.0
SC2V7L406M	2.7	40	±20%	30	25.47	0.088	40.50	18.0x30.0
SC2V7L506M	2.7	50	±20%	25	30.00	0.100	50.63	18.0x40.0
SC2V7L606M	2.7	60	±20%	25	32.40	0.120	60.75	18.0x40.0

■**Maximum Peak Current：Is the current taking 1 sec. to discharge from U_R to 1/2U_R**

■**Body color：Blue**

Dimensions & Packaging Quantity

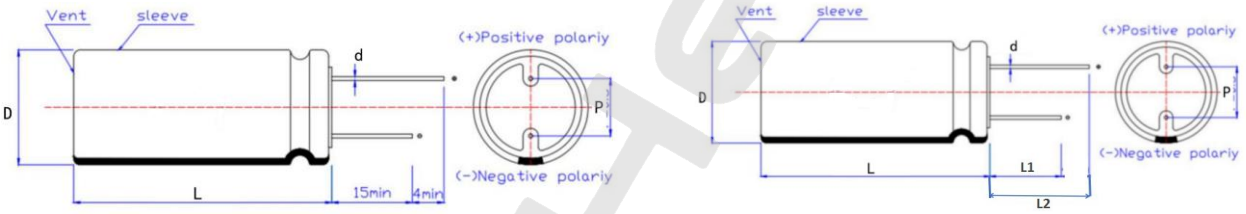

Part No.	D (mm)	L (mm)	P (mm)	d (mm)	L1 (mm)	L2 (mm)	Quantity(EA) Plastic Tray
SC2V7L504M	6.3±1.0	12.5±1.5	2.5±0.5	0.5±0.05	20.0±2.0	25.0±2.0	180
SC2V7L105M	6.3±1.0	12.5±1.5	2.5±0.5	0.5±0.05	20.0±2.0	25.0±2.0	180
SC2V7L105M-1	8.0±1.0	13.0±1.5	3.5±0.5	0.6±0.05	20.0±2.0	26.0±2.0	160
SC2V7L155M	6.3±1.0	12.5±1.5	2.5±0.5	0.5±0.05	20.0±2.0	25.0±2.0	180
SC2V7L155M-1	8.0±1.0	13.0±1.5	3.5±0.5	0.6±0.05	20.0±2.0	26.0±2.0	160
SC2V7L205M	8.0±1.0	16.0±1.5	3.5±0.5	0.6±0.05	20.0±2.0	26.0±2.0	140
SC2V7L205M-1	8.0±1.0	13.0±1.5	3.5±0.5	0.6±0.05	20.0±2.0	26.0±2.0	160
SC2V7L305M	8.0±1.0	20.0±1.5	3.5±0.5	0.6±0.05	20.0±2.0	26.0±2.0	120
SC2V7L335M	8.0±1.0	20.0±1.5	3.5±0.5	0.6±0.05	20.0±2.0	26.0±2.0	120
SC2V7L505M	8.0±1.0	24.0±1.5	3.5±0.5	0.6±0.05	20.0±2.0	26.0±2.0	100
SC2V7L505M-1	10.0±1.0	20.0±1.5	5.0±0.5	0.6±0.05	19.0±2.0	25.0±2.0	120
SC2V7L605M	10.0±1.0	20.0±1.5	5.0±0.5	0.6±0.05	19.0±2.0	25.0±2.0	120
SC2V7L705M	10.0±1.0	20.0±1.5	5.0±0.5	0.6±0.05	19.0±2.0	25.0±2.0	120
SC2V7L106M	10.0±1.0	25.0±2.0	5.0±0.5	0.6±0.05	22.0±2.0	28.0±2.0	80
SC2V7L106M-1	12.5±1.0	20.0±2.0	5.0±0.5	0.6±0.05	23.0±2.0	29.0±2.0	64
SC2V7L126M	12.5±1.0	20.0±2.0	5.0±0.5	0.6±0.05	23.0±2.0	29.0±2.0	64
SC2V7L156M	12.5±1.0	25.0±2.0	5.0±0.5	0.6±0.05	22.0±2.0	28.0±2.0	60
SC2V7L206M	12.5±1.0	25.0±2.0	5.0±0.5	0.6±0.05	22.0±2.0	28.0±2.0	60
SC2V7L256M	16.0±1.0	25.0±3.0	7.5±0.5	0.8±0.05	22.0±2.0	28.0±2.0	50
SC2V7L306M	16.0±1.0	30.0±3.0	7.5±0.5	0.8±0.05	22.0±2.0	28.0±2.0	50
SC2V7L406M	18.0±1.0	30.0±3.0	7.5±0.5	0.8±0.05	-	-	44
SC2V7L506M	18.0±1.0	40.0±3.0	7.5±0.5	0.8±0.05	-	-	26
SC2V7L606M	18.0±1.0	40.0±3.0	7.5±0.5	0.8±0.05	-	-	26

■Environmental Characteristics

Item	Requirement		Test Condition
Operating Temperature Range	-40°C~+65°C@2.7V +70°C@2.5V		
Rated Operating Voltage	2.7V DC		
High Temperature Characteristics	△C	Less than or equal to 30% of the initial value	Place in the higher operating temperature environment for 16h and test in this environment.
	ESR	Less than or equal to the initial value	
	Appearance	No leakage or mechanical damage	
Low Temperature Characteristics	△C	Less than or equal to 30% of the initial value	Place in the lower operating temperature environment for 2h and test in this environment.
	ESR	Less than or equal to 4 times the initial value	
	Appearance	No leakage or mechanical damage	
Endurance	△C	Less than or equal to 30% of the initial value	Applied voltage：2.7V Temperature：+65±2°C Time：1000h
	ESR	Less than or equal to 4 times the initial value	
	Appearance	No leakage or mechanical damage	
Cycle Life	△C	Less than or equal to 30% of the initial value	Capacitors cycles 500000 times between rated voltage and half rated voltage under constant current at 25°C . Shelf for 5s between each charge and discharge.
	ESR	Less than or equal to 4 times the initial value	
Humidity Characteristics	△C	Satisfies the range of 30% of the initial rating	Temperature：+40±2°C Relative humidity：90~95%RH Test time：240h
	ESR	Less than or equal to 4 times the initial value	
	Appearance	No leakage or mechanical damage	
Temperature Cycle	△C	Less than or equal to 10% of the initial value	Temperature cycle：-25±2°C → normal temperature →+70±2°C → normal temperature Cycles：5
	Appearance	No mechanical damage or leakage	
Low Temperature Storage Characteristics	△C	Satisfies the range of 10% of the initial rating	Applied voltage：0V Temperature：-40±2°C Time：96h
	ESR	Less than or equal to 2 times the initial value	
	Appearance	No leakage or mechanical damage	
High Temperature Storage Characteristics	△C	Satisfies the range of 10% of the initial rating	Applied voltage：0V Temperature：+70±2°C Time：96h
	ESR	Less than or equal to 2 times the initial value	
	Appearance	No leakage or mechanical damage	
Self Discharge Characteristics	The self-discharge cut-off voltage is greater than or equal to 80% of the rated voltage		Charging process: normal temperature, no load, rated voltage charge 8h Placement process: temperature less than or equal to 25°C, relative humidity less than 60% RH, open 24 h
Lead strength	No damage to the outlet		DL/T 1652-2016
Solder ability	More than 3/4 of the terminal surface is covered by a tin layer		DL/T 1652-2016

■Storage Temperature: -30~50℃; Relative Humidity:<60%RH

■Shelf life: 1 years Max

■Low ESR Cylindrical Type Supercapacitor


Specifications Value of Product：Cylindrical & Radial Type

Part No.	Rated Voltage (V)	Rated Capacitance (F)	Tolerance	Max. ESR 25℃ (mΩ)	Maximum Peak Current (25℃ <1s, A)	Leakage Current (25℃ 72h, mA)	Store energy (mWh)	Sizs DxL (mm)
SC2V7L504MLR	2.7	0.5	±20%	280	0.59	0.013	0.51	6.3x12.0
SC2V7L105MLR	2.7	1	±20%	240	1.12	0.008	1.01	6.3x12.5
SC2V7L105MLR-1	2.7	1	±20%	200	1.12	0.008	1.01	8.0x13.0
SC2V7L205MLR	2.7	2	±20%	160	2.04	0.012	2.03	8.0x13.0
SC2V7L355MLR	2.7	3.3	±20%	80	3.52	0.021	3.34	8.0x20.0
SC2V7L405MLR	2.7	4	±20%	120	3.64	0.015	4.05	8.0x16.0
SC2V7L505MLR	2.7	5	±20%	100	4.50	0.020	5.06	8.0x24.0
SC2V7L605MLR	2.7	6	±20%	55	6.09	0.036	6.08	10.0x20.0
SC2V7L505MLR-1	2.7	5	±20%	100	4.50	0.020	5.06	10.0x20.0
SC2V7L705MLR	2.7	7	±20%	60	6.65	0.030	7.09	10.0x20.0
SC2V7L106MLR	2.7	10	±20%	50	9.00	0.050	10.13	10.0x25.0
SC2V7L156MLR	2.7	15	±20%	45	12.08	0.065	15.19	12.5x25.0
SC2V7L206MLR	2.7	20	±20%	30	16.87	0.070	20.25	16.0x25.0

■Maximum Peak Current：Is the current taking 1 sec. to discharge from U_R to 1/2U_R

■Body color：Purple

Dimensions & Packaging Quantity

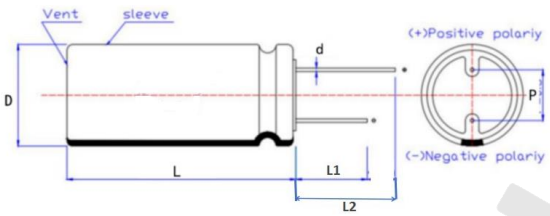

Part No.	D (mm)	L (mm)	P (mm)	d (mm)	L1 (mm)	L2 (mm)	Quantity(EA) Plastic Tray
SC2V7L504MLR	6.3±1.0	12.0±1.5	2.5±0.5	0.5±0.05	20.0±2.0	25.0±2.0	180
SC2V7L105MLR	6.3±1.0	12.5±1.5	2.5±0.5	0.5±0.05	20.0±2.0	25.0±2.0	180
SC2V7L105MLR-1	8.0±1.0	13.0±1.5	3.5±0.5	0.6±0.05	20.0±2.0	26.0±2.0	160
SC2V7L205MLR	8.0±1.0	13.0±1.5	3.5±0.5	0.6±0.05	20.0±2.0	26.0±2.0	160
SC2V7L335MLR	8.0±1.0	20.0±1.5	3.5±0.5	0.6±0.05	20.0±2.0	25.0±2.0	120
SC2V7L405MLR	8.0±1.0	16.0±1.5	3.5±0.5	0.6±0.05	20.0±2.0	26.0±2.0	140
SC2V7L505MLR	8.0±1.0	24.0±1.5	3.5±0.5	0.6±0.05	20.0±2.0	26.0±2.0	100
SC2V7L505MLR-1	10.0±1.0	20.0±1.5	5.0±0.5	0.6±0.05	19.0±2.0	25.0±2.0	120
SC2V7L605MLR	10.0±1.0	20.0±1.5	5.0±0.5	0.6±0.05	20.0±2.0	25.0±2.0	120
SC2V7L705MLR	10.0±1.0	20.0±1.5	5.0±0.5	0.6±0.05	19.0±2.0	25.0±2.0	120
SC2V7L106MLR	10.0±1.0	25.0±2.0	5.0±0.5	0.6±0.05	22.0±2.0	28.0±2.0	80
SC2V7L156MLR	12.5±1.0	25.0±2.0	5.0±0.5	0.6±0.05	23.0±2.0	29.0±2.0	60
SC2V7L206MLR	16.0±1.0	25.0±3.0	7.5±0.5	0.8±0.05	22.0±2.0	28.0±2.0	50

■Environmental Characteristics

Item	Requirement		Test Condition
Operating Temperature Range	-40°C~+65°C@2.7V +70°C@2.5V		
Rated Operating Voltage	2.7V DC		
High Temperature Characteristics	△C	Less than or equal to 30% of the initial value	Place in the higher operating temperature environment for 16h and test in this environment.
	ESR	Less than or equal to the initial value	
	Appearance	No leakage or mechanical damage	
Low Temperature Characteristics	△C	Less than or equal to 30% of the initial value	Place in the lower operating temperature environment for 2h and test in this environment.
	ESR	Less than or equal to 4 times the initial value	
	Appearance	No leakage or mechanical damage	
Endurance	△C	Less than or equal to 30% of the initial value	Applied voltage：2.7V Temperature：+65±2°C Time：1000h
	ESR	Less than or equal to 4 times the initial value	
	Appearance	No leakage or mechanical damage	
Cycle Life	△C	Less than or equal to 30% of the initial value	Capacitors cycles 500000 times between rated voltage and half rated voltage under constant current at 25°C . Shelf for 5s between each charge and discharge.
	ESR	Less than or equal to 4 times the initial value	
Humidity Characteristics	△C	Satisfies the range of 30% of the initial rating	Temperature：+40±2°C Relative humidity：90~95%RH Test time：240h
	ESR	Less than or equal to 4 times the initial value	
	Appearance	No leakage or mechanical damage	
Temperature Cycle	△C	Less than or equal to 10% of the initial value	Temperature cycle：-25±2°C → normal temperature →+70±2°C →normal temperature Cycles：5
	Appearance	No mechanical damage or leakage	
Low Temperature Storage Characteristics	△C	Satisfies the range of 10% of the initial rating	Applied voltage：0V Temperature：-40±2°C Time：96h
	ESR	Less than or equal to 2 times the initial value	
	Appearance	No leakage or mechanical damage	
High Temperature Storage Characteristics	△C	Satisfies the range of 10% of the initial rating	Applied voltage：0V Temperature：+70±2°C Time：96h
	ESR	Less than or equal to 2 times the initial value	
	Appearance	No leakage or mechanical damage	
Self Discharge Characteristics	The self-discharge cut-off voltage is greater than or equal to 80% of the rated voltage		Charging process: normal temperature, no load, rated voltage charge 8h Placement process: temperature less than or equal to 25°C, relative humidity less than 60% RH, open 24 h
Lead strength	No damage to the outlet		DL/T 1652-2016
Solder ability	More than 3/4 of the terminal surface is covered by a tin layer		DL/T 1652-2016

■Storage Temperature: -30~50℃; Relative Humidity:<60%RH

■Shelf life: 1 years Max

■High Voltage Cylindrical Type Supercapacitor


Specifications Value of Product

Part No.	Rated Voltage (V)	Rated Capacitance (F)	Tolerance	Max. ESR 25ºC (mΩ)	Maximum Peak Current (25ºC <1s, A)	Leakage Current (25ºC 72h, mA)	Store energy (mWh)	Sizs DxL (mm)
SC3V0L504MV	3.0	0.5	±20%	500	0.54	0.008	0.63	6.3x12.5
SC3V0L105MV	3.0	1.0	±20%	350	1.00	0.008	1.25	8.0x13.0
SC3V0L105MV-1	3.0	1.0	±20%	500	0.90	0.008	1.25	6.3x12.5
SC3V0L155MV	3.0	1.5	±20%	500	1.16	0.008	1.88	6.3x12.5
SC3V0L155MV-1	3.0	1.5	±20%	350	1.33	0.010	1.88	8.0x13.0
SC3V0L205MV	3.0	2.0	±20%	240	1.93	0.012	2.50	8.0x13.0
SC3V0L205MV-1	3.0	2.0	±20%	200	1.99	0.012	2.50	8.0x16.0
SC3V0L305MV	3.0	3.0	±20%	160	2.98	0.013	3.75	8.0x20.0
SC3V0L335MV	3.0	3.3	±20%	160	3.19	0.013	4.13	8.0x20.0
SC3V0L505MV	3.0	5.0	±20%	120	4.82	0.016	6.25	8.0x24.0
SC3V0L505MV-1	3.0	5.0	±20%	120	4.91	0.016	6.25	10.0x20.0
SC3V0L605MV	3.0	6.0	±20%	100	5.59	0.024	7.50	10.0x20.0
SC3V0L6059V	3.0	6.0	+30%/-10%	100	5.59	0.024	7.50	10.0x20.0
SC3V0L705MV	3.0	7.0	±20%	80	6.34	0.028	8.75	10.0x20.0
SC3V0L106MV	3.0	10	±20%	65	8.18	0.030	12.50	10.0x25.0
SC3V0L106MV-1	3.0	10	±20%	70	7.94	0.030	12.50	12.5x20.0
SC3V0L126MV	3.0	12	±20%	65	9.01	0.032	15.00	12.5x20.0
SC3V0L156MV	3.0	15	±20%	55	11.10	0.050	18.75	12.5x25.0
SC3V0L156MV-1	3.0	15	±20%	70	10.97	0.050	18.75	12.5x20.0
SC3V0L206MV	3.0	20	±20%	70	11.25	0.065	25.00	12.5x30.0
SC3V0L206MV-1	3.0	20	±20%	50	14.21	0.060	25.00	12.5x25.0
SC3V0L256MV	3.0	25	±20%	45	19.29	0.070	31.25	16.0x25.0
SC3V0L2569V	3.0	25	+30%/-10%	45	19.29	0.070	31.25	16.0x25.0
SC3V0L306MV	3.0	30	±20%	30	21.32	0.078	37.50	16.0x30.0
SC3V0L406MV	3.0	40	±20%	30	25.47	0.088	50.00	18.0x30.0
SC3V0L506MV	3.0	50	±20%	25	30.00	0.100	62.50	18.0x40.0
SC3V0L606MV	3.0	60	±20%	25	32.40	0.120	75.00	18.0x40.0

■Maximum Peak Current：Is the current taking 1 sec. to discharge from U_R to 1/2U_R

■Body color：Blue

Dimensions & Packaging Quantity

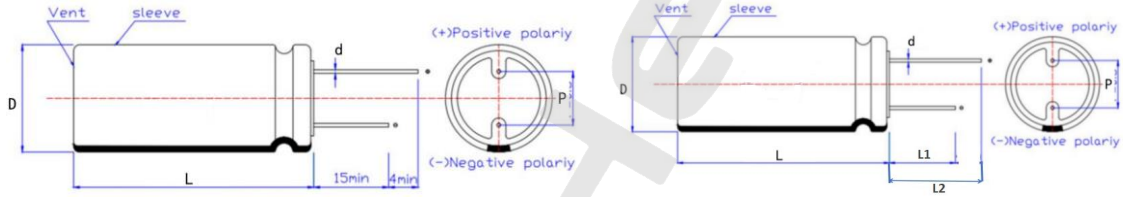

Part No.	D (mm)	L (mm)	P (mm)	d (mm)	L1 (mm)	L2 (mm)	Quantity(EA) Plastic Tray
SC3V0L504MV	6.3±1.0	12.5±1.5	2.5±0.5	0.5±0.05	20.0±2.0	25.0±2.0	180
SC3V0L105MV	8.0±1.0	13.0±1.5	3.5±0.5	0.6±0.05	20.0±2.0	26.0±2.0	160
SC3V0L105MV-1	6.3±1.0	12.5±1.5	2.5±0.5	0.5±0.05	20.0±2.0	25.0±2.0	180
SC3V0L155MV	6.3±1.0	12.5±1.5	2.5±0.5	0.5±0.05	20.0±2.0	25.0±2.0	180
SC3V0L155MV-1	8.0±1.0	13.0±1.5	3.5±0.5	0.6±0.05	20.0±2.0	26.0±2.0	160
SC3V0L205MV	8.0±1.0	13.0±1.5	3.5±0.5	0.6±0.05	20.0±2.0	26.0±2.0	160
SC3V0L205MV-1	8.0±1.0	16.0±1.5	3.5±0.5	0.6±0.05	20.0±2.0	26.0±2.0	140
SC3V0L305MV	8.0±1.0	20.0±1.5	3.5±0.5	0.6±0.05	20.0±2.0	26.0±2.0	120
SC3V0L335MV	8.0±1.0	20.0±1.5	3.5±0.5	0.6±0.05	20.0±2.0	26.0±2.0	120
SC3V0L505MV	8.0±1.0	24.0±1.5	3.5±0.5	0.6±0.05	20.0±2.0	26.0±2.0	100
SC3V0L505MV-1	10.0±1.0	20.0±1.5	5.0±0.5	0.6±0.05	19.0±2.0	25.0±2.0	120
SC3V0L605MV	10.0±1.0	20.0±1.5	5.0±0.5	0.6±0.05	19.0±2.0	25.0±2.0	120
SC3V0L6059V	10.0±1.0	20.0±1.5	5.0±0.5	0.6±0.05	19.0±2.0	25.0±2.0	120
SC3V0L705MV	10.0±1.0	20.0±1.5	5.0±0.5	0.6±0.05	19.0±2.0	25.0±2.0	120
SC3V0L106MV	10.0±1.0	25.0±2.0	5.0±0.5	0.6±0.05	22.0±2.0	28.0±2.0	80
SC3V0L106MV-1	12.5±1.0	20.0±2.0	5.0±0.5	0.6±0.05	23.0±2.0	29.0±2.0	64
SC3V0L126MV	12.5±1.0	20.0±2.0	5.0±0.5	0.6±0.05	23.0±2.0	29.0±2.0	64
SC3V0L156MV	12.5±1.0	25.0±2.0	5.0±0.5	0.6±0.05	22.0±2.0	28.0±2.0	60
SC3V0L156MV-1	12.5±1.0	20.0±2.0	5.0±0.5	0.6±0.05	23.0±2.0	29.0±2.0	64
SC3V0L206MV	12.5±1.0	30.0±2.0	5.0±0.5	0.6±0.05	22.0±2.0	28.0±2.0	60
SC3V0L206MV-1	12.5±1.0	25.0±2.0	5.0±0.5	0.6±0.05	22.0±2.0	28.0±2.0	60
SC3V0L256MV	16.0±1.0	25.0±3.0	7.5±0.5	0.8±0.05	22.0±2.0	28.0±2.0	50
SC3V0L2569V	16.0±1.0	25.0±3.0	7.5±0.5	0.8±0.05	22.0±2.0	28.0±2.0	50
SC3V0L306MV	16.0±1.0	30.0±3.0	7.5±0.5	0.8±0.05	22.0±2.0	28.0±2.0	50
SC3V0L406MV	18.0±1.0	30.0±3.0	7.5±0.5	0.8±0.05	-	-	44
SC3V0L506MV	18.0±1.0	40.0±3.0	7.5±0.5	0.8±0.05	-	-	26
SC3V0L606MV	18.0±1.0	40.0±3.0	7.5±0.5	0.8±0.05	-	-	26

■Environmental Characteristics

Item	Requirement		Test Condition
Operating Temperature Range	-40°C~+65°C@3.0V +70°C@2.7V		
Rated Operating Voltage	3.0V DC		
High Temperature Characteristics	△C	Less than or equal to 30% of the initial value	Place in the higher operating temperature environment for 16h and test in this environment.
	ESR	Less than or equal to the initial value	
	Appearance	No leakage or mechanical damage	
Low Temperature Characteristics	△C	Less than or equal to 30% of the initial value	Place in the higher operating temperature environment for 2h and test in this environment.
	ESR	Less than or equal to 4 times the initial value	
	Appearance	No leakage or mechanical damage	
Endurance	△C	Less than or equal to 30% of the initial value	Applied voltage：3.0V Temperature：+65±2°C Time：1000h
	ESR	Less than or equal to 4 times the initial value	
	Appearance	No leakage or mechanical damage	
Cycle Life	△C	Less than or equal to 30% of the initial value	Capacitors cycles 500000 times between rated voltage and half rated voltage under constant current at 25°C . Shelf for 5s between each charge and discharge.
	ESR	Less than or equal to 4 times the initial value	
Humidity Characteristics	△C	Less than or equal to 30% of the initial value	Temperature：+40±2°C Relative humidity：90~95%RH Test time：240h
	ESR	Less than or equal to 4 times the initial value	
	Appearance	No leakage or mechanical damage	
Temperature cycle	△C	Less than or equal to 10% of the initial value	Temperature cycle：-25±2°C →normal temperature →+70±2°C→normal temperature Cycles：5
	Appearance	No leakage or mechanical damage	
Low Temperature Storage Characteristics	△C	Satisfies the range of 10% of the initial rating	Applied voltage：0V Temperature：-40±2°C Time：96h
	ESR	Less than or equal to 2 times the initial value	
	Appearance	No leakage or mechanical damage	
High Temperature Storage Characteristics	△C	Satisfies the range of 10% of the initial rating	Applied voltage：0V Temperature：+70±2°C Time：96h
	ESR	Less than or equal to 2 times the initial value	
	Appearance	No leakage or mechanical damage	
Self Discharge Characteristics	The self-discharge cut-off voltage is greater than or equal to 80% of the rated voltage		Charging process: normal temperature, no load, rated voltage charge 8h Placement process: temperature less than or equal to 25°C, relative humidity less than 60% RH, open 24 h
Lead strength	No damage to the outlet		DL/T 1652-2016
Solder ability	More than 3/4 of the terminal surface is covered by a tin layer		DL/T 1652-2016

■Storage Temperature: -30~50°C; Relative Humidity:<60%RH

■Shelf life: 1 years Max

■High Temperature Cylindrical Type Supercapacitor


Specifications Value of Product

Part No.	Rated Voltage (V)	Rated Capacitance (F)	Tolerance	Max. ESR 25℃ (mΩ)	Maximum Peak Current (25℃<1s, A)	Leakage Current (25℃72h, mA)	Store energy (mWh)	Sizs DxL (mm)
SC2V7L504MH	2.7	0.5	±20%	500	0.54	0.008	0.51	6.3x12.5
SC2V7L105MH	2.7	1.0	±20%	350	1.00	0.008	1.01	8.0x13.0
SC2V7L105MH-1	2.7	1.0	±20%	500	0.90	0.008	1.01	6.3x12.5
SC2V7L155MH	2.7	1.5	±20%	350	1.33	0.010	1.52	8.0x13.0
SC2V7L155MH-1	2.7	1.5	±20%	500	1.16	0.008	1.52	6.3x12.5
SC2V7L205MH	2.7	2.0	±20%	200	1.99	0.012	2.03	8.0x16.0
SC2V7L205MH-1	2.7	2.0	±20%	200	1.92	0.012	2.03	8.0x20.0
SC2V7L205MH-2	2.7	2.0	±20%	240	1.93	0.012	2.03	8.0x13.0
SC2V7L305MH	2.7	3.0	±20%	160	2.98	0.017	3.04	8.0x20.0
SC2V7L305MH-1	2.7	3.0	±20%	160	2.74	0.015	3.04	8.0x16.0
SC2V7L335MH	2.7	3.3	±20%	160	3.19	0.017	3.34	8.0x20.0
SC2V7L405MH	2.7	4.0	±20%	150	3.38	0.015	4.05	8.0x16.0
SC2V7L505MH	2.7	5.0	±20%	120	4.82	0.020	5.06	8.0x24.0
SC2V7L505MH-1	2.7	5.0	±20%	120	4.91	0.020	5.06	10.0x20.0
SC2V7L605MH	2.7	6.0	±20%	100	5.59	0.025	6.08	10.0x20.0
SC2V7L705MH	2.7	7.0	±20%	80	6.34	0.030	7.09	10.0x20.0
SC2V7L106MH	2.7	10	±20%	65	8.18	0.050	10.13	10.0x25.0
SC2V7L106MH-1	2.7	10	±20%	70	7.94	0.050	10.13	12.5x20.0
SC2V7L126MH	2.7	12	±20%	65	9.01	0.050	12.15	12.5x20.0
SC2V7L156MH	2.7	15	±20%	55	11.10	0.065	15.19	12.5x25.0
SC2V7L206MH	2.7	20	±20%	50	14.21	0.080	20.25	12.5x25.0
SC2V7L206MH-1	2.7	20	±20%	70	11.25	0.065	20.25	12.5x30.0
SC2V7L256MH	2.7	25	±20%	45	19.29	0.070	25.31	16.0x25.0
SC2V7L256MH-1	2.7	25	±20%	65	12.86	0.070	25.31	12.5x30.0
SC2V7L306MH	2.7	30	±20%	30	21.32	0.078	30.38	16.0x30.0
SC2V7L406MH	2.7	40	±20%	30	25.47	0.088	40.50	18.0x30.0
SC2V7L506MH	2.7	50	±20%	25	30.00	0.100	50.63	18.0x40.0
SC2V7L606MH	2.7	60	±20%	25	32.40	0.120	60.75	18.0x40.0

■**Maximum Peak Current：Is the current taking 1 sec. to discharge from U_R to 1/2U_R**

■**Body color：Black**

Dimensions & Packaging Quantity

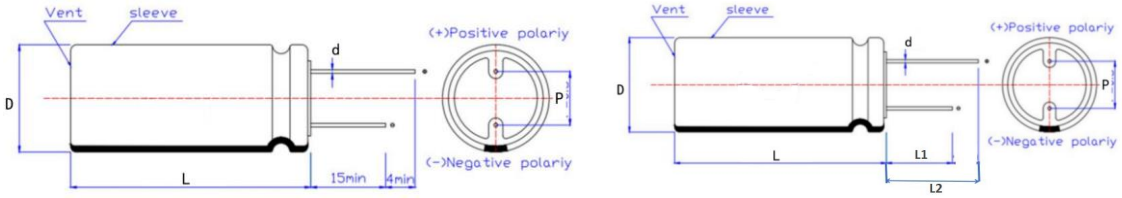

Part No.	D (mm)	L (mm)	P (mm)	d (mm)	L1 (mm)	L2 (mm)	Quantity(EA) Plastic Tray
SC2V7L504MH	6.3±1.0	12.5±1.5	2.5±0.5	0.5±0.05	20.0±2.0	25.0±2.0	180
SC2V7L105MH	8.0±1.0	13.0±1.5	3.5±0.5	0.6±0.05	20.0±2.0	26.0±2.0	160
SC2V7L105MH-1	6.3±1.0	12.5±1.5	2.5±0.5	0.5±0.05	20.0±2.0	25.0±2.0	180
SC2V7L155MH	8.0±1.0	13.0±1.5	3.5±0.5	0.6±0.05	20.0±2.0	26.0±2.0	160
SC2V7L155MH-1	6.3±1.0	12.5±1.5	2.5±0.5	0.5±0.05	20.0±2.0	25.0±2.0	180
SC2V7L205MH	8.0±1.0	16.0±1.5	3.5±0.5	0.6±0.05	20.0±2.0	26.0±2.0	140
SC2V7L205MH-1	8.0±1.0	20.0±1.5	3.5±0.5	0.6±0.05	20.0±2.0	26.0±2.0	120
SC2V7L205MH-2	8.0±1.0	13.0±1.5	3.5±0.5	0.6±0.05	20.0±2.0	26.0±2.0	160
SC2V7L305MH	8.0±1.0	20.0±1.5	3.5±0.5	0.6±0.05	20.0±2.0	26.0±2.0	120
SC2V7L305MH-1	8.0±1.0	16.0±1.5	3.5±0.5	0.6±0.05	20.0±2.0	26.0±2.0	140
SC2V7L335MH	8.0±1.0	20.0±1.5	3.5±0.5	0.6±0.05	20.0±2.0	26.0±2.0	120
SC2V7L405MH	8.0±1.0	16.0±1.5	3.5±0.5	0.6±0.05	20.0±2.0	26.0±2.0	140
SC2V7L505MH	8.0±1.0	24.0±1.5	3.5±0.5	0.6±0.05	20.0±2.0	26.0±2.0	100
SC2V7L505MH-1	10.0±1.0	20.0±1.5	5.0±0.5	0.6±0.05	19.0±2.0	25.0±2.0	120
SC2V7L605MH	10.0±1.0	20.0±1.5	5.0±0.5	0.6±0.05	19.0±2.0	25.0±2.0	120
SC2V7L705MH	10.0±1.0	20.0±1.5	5.0±0.5	0.6±0.05	19.0±2.0	25.0±2.0	120
SC2V7L106MH	10.0±1.0	25.0±2.0	5.0±0.5	0.6±0.05	22.0±2.0	28.0±2.0	80
SC2V7L106MH-1	12.5±1.0	20.0±2.0	5.0±0.5	0.6±0.05	23.0±2.0	29.0±2.0	64
SC2V7L126MH	12.5±1.0	20.0±2.0	5.0±0.5	0.6±0.05	23.0±2.0	29.0±2.0	64
SC2V7L156MH	12.5±1.0	25.0±2.0	5.0±0.5	0.6±0.05	22.0±2.0	28.0±2.0	60
SC2V7L206MH	12.5±1.0	25.0±2.0	5.0±0.5	0.6±0.05	22.0±2.0	28.0±2.0	60
SC2V7L206MH-1	12.5±1.0	30.0±2.0	5.0±0.5	0.6±0.05	22.0±2.0	28.0±2.0	60
SC2V7L256MH	16.0±1.0	25.0±3.0	7.5±0.5	0.8±0.05	22.0±2.0	28.0±2.0	50
SC2V7L256MH-1	12.5±1.0	30.0±2.0	5.0±0.5	0.6±0.05	22.0±2.0	28.0±2.0	60
SC2V7L306MH	16.0±1.0	30.0±3.0	7.5±0.5	0.8±0.05	22.0±2.0	28.0±2.0	50
SC2V7L406MH	18.0±1.0	30.0±3.0	7.5±0.5	0.8±0.05	-	-	44
SC2V7L506MH	18.0±1.0	40.0±3.0	7.5±0.5	0.8±0.05	-	-	26
SC2V7L606MH	18.0±1.0	40.0±3.0	7.5±0.5	0.8±0.05	-	-	26

■Environmental Characteristics

Item	Requirement		Test Condition
Operating Temperature Range	-40°C~+70°C@2.7V +85°C@2.5V		
Rated Operating Voltage	2.7V DC		
High Temperature Characteristics	△C	Less than or equal to 30% of the initial value	Place in the higher operating temperature environment for 16h and test in this environment
	ESR	Less than or equal to the initial value	
	Appearance	No leakage or mechanical damage	
Low Temperature Characteristics	△C	Less than or equal to 30% of the initial value	Place in the lower operating temperature environment for 2h and test in this environment
	ESR	Less than or equal to 4 times the initial value	
	Appearance	No leakage or mechanical damage	
Endurance	△C	Less than or equal to 30% of the initial value	Applied voltage：2.5V Temperature：+85±2°C Time：1000h
	ESR	Less than or equal to 4 times the initial value	
	Appearance	No leakage or mechanical damage	
Cycle Life	△C	Less than or equal to 30% of the initial value	Capacitors cycles 500000 times between rated voltage and half rated voltage under constant current at 25°C . Shelf for 5s between each charge and discharge.
	ESR	Less than or equal to 4 times the initial value	
Humidity Characteristics	△C	Less than or equal to 30% of the initial value	Temperature：+40±2°C Relative humidity：90~95%RH Test time：240h
	ESR	Less than or equal to 4 times the initial value	
	Appearance	No leakage or mechanical damage	
Temperature Cycle	△C	Less than or equal to 10% of the initial value	Temperature cycle：-40±2°C→normal temperature →+85±2°C→normal temperature Cycles：5
	Appearance	No leakage or mechanical damage	
Low Temperature Storage Characteristics	△C	Satisfies the range of 10% of the initial rating	Applied voltage：0V Temperature：-40±2°C Time：96h
	ESR	Less than or equal to 2 times the initial value	
	Appearance	No leakage or mechanical damage	
High Temperature Storage Characteristics	△C	Satisfies the range of 10% of the initial rating	Applied voltage：0V Temperature：+85±2°C Time：96h
	ESR	Less than or equal to 2 times the initial value	
	Appearance	No leakage or mechanical damage	
Self Discharge Characteristics	The self-discharge cut-off voltage is greater than or equal to 80% of the rated voltage		Charging process: normal temperature, no load, rated voltage charge 8h Placement process: temperature less than or equal to 25°C, relative humidity less than 60% RH, open 24 h
Lead strength	No damage to the outlet		DL/T 1652-2016
Solder ability	More than 3/4 of the terminal surface is covered by a tin layer		DL/T 1652-2016

■Storage Temperature: -30~50℃; Relative Humidity:<60%RH

■Shelf life: 1 years Max

■Standard Combined Type Supercapacitor

Specifications Value of Standard Product


Part No.	Rated Voltage (V)	Rated Capacitance (F)	Tolerance	Max. ESR 25℃ (mΩ)	Maximum Peak Current (25℃<1s, A)	Leakage Current (25℃72h, mA)	Store energy (mWh)	Sizs WxHxL (mm)
SC5V5Z224Z	5.5	0.22	+80%/-20%	1000	0.48	0.008	0.92	6.5x13.8x13.5
SC5V5Z334Z	5.5	0.33	+80%/-20%	1000	0.68	0.008	1.39	6.5x13.8x13.5
SC5V5Z3349-1	5.5	0.33	+30%/-20%	700	0.74	0.008	1.39	8.5x14.0x17.0
SC5V5Z474M	5.5	0.47	±20%	1000	0.88	0.008	1.97	6.5x13.8x13.5
SC5V5Z4749	5.5	0.47	+30%/-10%	600	1.01	0.010	1.97	8.5x14.0x17.0
SC5V5Z504M	5.5	0.50	±20%	1000	0.88	0.008	2.10	6.5x13.8x13.5
SC5V5Z504M-1	5.5	0.50	±20%	600	1.06	0.010	2.1	8.5x14.0x17.0
SC5V5Z105Z	5.5	1.0	+80%/-20%	400	1.96	0.017	4.20	8.5x21.0x17.0
SC5V5Z105M-1	5.5	1.0	±20%	360	2.02	0.012	4.20	8.5x17.0x17.0
SC5V5Z105M-2	5.5	1.0	±20%	500	1.83	0.012	4.20	8.5x14.0x17.0
SC5V5Z155M	5.5	1.5	±20%	270	3.03	0.017	6.30	8.5x21.0x17.0
SC5V5Z155M-1	5.5	1.5	±20%	300	2.84	0.016	6.30	8.5x17.0x17.0
SC5V5Z205M	5.5	2.0	±20%	220	3.93	0.020	8.40	8.5x21.0x17.0
SC5V5Z205M-1	5.5	2.0	±20%	220	4.04	0.020	8.40	8.5x25.0x17.0
SC5V5Z255M	5.5	2.5	±20%	170	4.91	0.020	10.50	8.5x25.0x17.0
SC5V5Z255M-1	5.5	2.5	±20%	200	5.00	0.020	10.50	10.0x21.0x21.0
SC5V5Z305M	5.5	3.0	±20	160	5.69	0.025	12.60	8.5x25.0x17.0
SC5V5Z305M-1	5.5	3.0	±20	180	5.69	0.025	12.60	10.0x21.0x21.0
SC5V5Z355M	5.5	3.5	±20%	160	6.31	0.030	14.70	10.0x21.0x21.0
SC5V5Z505M	5.5	5.0	±20%	120	8.59	0.050	21.01	10.0x26.0x21.0
SC5V5Z505M-1	5.5	5.0	±20%	120	8.59	0.050	21.01	13.0x27.0x26.0
SC5V5Z505M-3	5.5	5.0	±20%	120	8.59	0.050	21.01	13.0x22.0x26.0
SC5V5Z755M	5.5	7.5	±20%	120	10.86	0.065	31.51	13.0x22.0x26.0
SC5V5Z106M	5.5	10	±20%	90	14.47	0.060	42.01	16.0x28.0x33.0
SC5V5Z106M-1	5.5	10	±20%	100	14.47	0.080	42.01	13.0x27.0x26.0
SC5V5Z156M	5.5	15	±20%	70	20.12	0.078	63.02	16.0x33.0x33.0
SC5V5Z256M	5.5	25	±20%	60	27.50	0.100	105.03	18.0x43.0x37.0

■Maximum Peak Current：Is the current taking 1 sec. to discharge from U_R to 1/2U_R

■Body color：Blue

Supercapacitor

Dimensions & Packaging Quantity

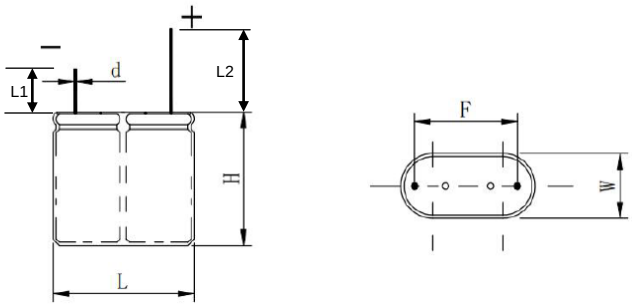

Part No.	L (mm)	W (mm)	H (mm)	F (mm)	d (mm)	L1 (mm)	L2 (mm)	Quantity (EA) Plastic Tray	Quantity (EA) Plastic Bag
SC5V5Z224Z	13.5±1.0	6.5±1.0	13.8±2.0	9.0±0.5	0.5±0.05	19.0±2.0	24.0±2.0	80	-
SC5V5Z334Z	13.5±1.0	6.5±1.0	13.8±2.0	9.0±0.5	0.5±0.05	19.0±2.0	24.0±2.0	80	
SC5V5Z3349-1	17.0±1.0	8.5±1.0	14.0±2.0	12.0±0.5	0.6±0.05	19.0±2.0	24.0±2.0	64	
SC5V5Z474M	13.5±1.0	6.5±1.0	13.8±2.0	9.0±0.5	0.5±0.05	19.0±2.0	24.0±2.0	80	-
SC5V5Z4749	17.0±1.0	8.5±1.0	14.0±2.0	12.0±0.5	0.6±0.05	19.0±2.0	24.0±2.0	64	-
SC5V5Z504M	13.5±1.0	6.5±1.0	13.8±2.0	9.0±0.5	0.5±0.05	19.0±2.0	24.0±2.0	80	
SC5V5Z504M-1	17.0±1.0	8.5±1.0	14.0±2.0	12.0±0.5	0.6±0.05	19.0±2.0	24.0±2.0	64	
SC5V5Z105Z	17.0±1.0	8.5±1.0	21.0±2.0	12.0±0.5	0.6±0.05	19.0±2.0	24.0±2.0	48	-
SC5V5Z105M-1	17.0±1.0	8.5±1.0	17.0±2.0	12.0±0.5	0.6±0.05	19.0±2.0	24.0±2.0	48	-
SC5V5Z105M-2	17.0±1.0	8.5±1.0	14.0±2.0	12.0±0.5	0.6±0.05	19.0±2.0	24.0±2.0	64	
SC5V5Z155M	17.0±1.0	8.5±1.0	21.0±2.0	12.0±0.5	0.6±0.05	19.0±2.0	24.0±2.0	48	-
SC5V5Z155M-1	17.0±1.0	8.5±1.0	17.0±2.0	12.0±0.5	0.6±0.05	19.0±2.0	24.0±2.0	48	
SC5V5Z205M	17.0±1.0	8.5±1.0	21.0±2.0	12.0±0.5	0.6±0.05	19.0±2.0	24.0±2.0	48	
SC5V5Z205M-1	17.0±1.0	8.5±1.0	25.0±2.0	12.0±0.5	0.6±0.05	19.0±2.0	24.0±2.0	48	
SC5V5Z255M	17.0±1.0	8.5±1.0	25.0±2.0	12.0±0.5	0.6±0.05	19.0±2.0	24.0±2.0	48	-
SC5V5Z255M-1	21.0±1.0	10.0±1.0	21.0±2.0	15.5±0.5	0.6±0.05	19.0±2.0	24.0±2.0	40	
SC5V5Z305M	17.0±1.0	8.5±1.0	25.0±2.0	12.0±0.5	0.6±0.05	19.0±2.0	24.0±2.0	48	
SC5V5Z305M-1	21.0±1.0	10.0±1.0	21.0±2.0	15.5±0.5	0.6±0.05	19.0±2.0	24.0±2.0	40	
SC5V5Z355M	21.0±1.0	10.0±1.0	21.0±2.0	15.5±0.5	0.6±0.05	19.0±2.0	24.0±2.0	40	-
SC5V5Z505M	21.0±1.0	10.0±1.0	26.0±2.0	15.5±0.5	0.6±0.05	21.0±2.0	27.0±2.0	30	-
SC5V5Z505M-1	26.0±1.0	13.0±1.0	27.0±2.0	18.0±0.5	0.6±0.05	19.0±2.0	24.0±2.0	20	-
SC5V5Z505M-3	26.0±1.0	13.0±1.0	22.0±2.0	18.0±0.5	0.6±0.05	22.0±2.0	28.0±2.0	32	
SC5V5Z755M	26.0±1.0	13.0±1.0	22.0±2.0	18.0±0.5	0.6±0.05	22.0±2.0	28.0±2.0	32	
SC5V5Z106M	33.0±1.0	16.0±1.0	28.0±2.0	24.0±0.5	0.8±0.05	21.0±2.0	27.0±2.0	20	
SC5V5Z106M-1	26.0±1.0	13.0±1.0	27.0±2.0	18.0±0.5	0.6±0.05	21.0±2.0	27.0±2.0	20	
SC5V5Z156M	33.0±1.0	16.0±1.0	33.0±2.0	24.0±0.5	0.8±0.05	21.0±2.0	27.0±2.0	16	-
SC5V5Z256M	37.0±1.0	18.0±1.0	43.0±2.0	26.0±0.5	0.8±0.05	23.0±2.0	28.0±2.0	-	40

■Environmental Characteristics

Item	Requirement		Test Condition
Operating Temperature Range	-40°C~+70°C		
Rated Operating Voltage	5.5V DC		
High Temperature Characteristics	△C	Less than or equal to 30% of the initial value	Place in the higher operating temperature environment for 16h and test in this environment
	ESR	Less than or equal to the initial value	
	Appearance	No leakage or mechanical damage	
Low Temperature Characteristics	△C	Less than or equal to 30% of the initial value	Place in the lower operating temperature environment for 2h and test in this environment
	ESR	Less than or equal to 4 times the initial value	
	Appearance	No leakage or mechanical damage	
Endurance	△C	Less than or equal to 30% of the initial value	Applied voltage：5.0V Temperature：+65±2°C Time：1000h
	ESR	Less than or equal to 4 times the initial value	
	Appearance	No leakage or mechanical damage	
Cycle Life	△C	Less than or equal to 30% of the initial value	Capacitors cycles 500000 times between rated voltage and half rated voltage under constant current at 25°C . Shelf for 5s between each charge and discharge.
	ESR	Less than or equal to 4 times the initial value	
Humidity Characteristics	△C	Less than or equal to 30% of the initial value	Temperature：+40±2°C Relative humidity：90~95%RH Test time：240h
	ESR	Less than or equal to 4 times the initial value	
	Appearance	No leakage or mechanical damage	
Temperature Cycle	△C	Less than or equal to 10% of the initial value	Temperature cycle：-40±2°C→normal temperature →+70±2°C→normal temperature Cycles：5
	Appearance	No leakage or mechanical damage	
Low Temperature Storage Characteristics	△C	Satisfies the range of 10% of the initial rating	Applied voltage：0V Temperature：-40±2°C Time：96h
	ESR	Less than or equal to 2 times the initial value	
	Appearance	No leakage or mechanical damage	
High Temperature Storage Characteristics	△C	Satisfies the range of 10% of the initial rating	Applied voltage：0V Temperature：+70±2°C Time：96h
	ESR	Less than or equal to 2 times the initial value	
	Appearance	No leakage or mechanical damage	
Self Discharge Characteristics	The self-discharge cut-off voltage is greater than or equal to 80% of the rated voltage		Charging process: normal temperature, no load, rated voltage charge 8h Placement process: temperature less than or equal to 25°C, relative humidity less than 60% RH, open 24 h
Lead strength	No damage to the outlet		DL/T 1652-2016
Solder ability	More than 3/4 of the terminal surface is covered by a tin layer		DL/T 1652-2016

■Storage Temperature: -30~50℃; Relative Humidity:<60%RH

■Shelf life: 1 years Max

■High Voltage Combined Type Supercapacitor

Specifications Value of Product


Part No.	Rated Voltage (V)	Rated Capacitance (F)	Tolerance	Max. ESR 25℃ (mΩ)	Maximum Peak Current (25℃<1s, A)	Leakage Current (25℃72h, mA)	Store energy (mWh)	Sizs WxHxL (mm)
SC6V0Z224ZV	6.0	0.22	-20%~+80%	1000	0.48	0.008	1.10	6.5x13.8x13.5
SC6V0Z334ZV	6.0	0.33	-20%~+80%	1000	0.68	0.008	1.65	6.5x13.8x13.5
SC6V0Z3349V-1	6.0	0.33	-10%~+30%	700	0.74	0.008	1.65	8.5x14.0x17.0
SC6V0Z474MV	6.0	0.47	±20%	1000	0.88	0.008	2.35	6.5x13.8x13.5
SC6V0Z4749V-1	6.0	0.47	-10%~+30%	600	1.01	0.010	2.35	8.5x14.0x17.0
SC6V0Z504MV	6.0	0.5	±20%	1000	0.88	0.008	2.50	6.5x13.8x13.5
SC6V0Z504MV-2	6.0	0.5	±20%	600	1.06	0.010	2.50	8.5x14.0x17.0
SC6V0Z105ZV	6.0	1	-20%~+80%	400	1.96	0.017	5.00	8.5x21.0x17.0
SC6V0Z105MV-1	6.0	1	±20%	480	1.83	0.012	5.00	8.5x14.0x17.0
SC6V0Z105MV-2	6.0	1	±20%	400	2.02	0.012	5.00	8.5x17.0x17.0
SC6V0Z155MV	6.0	1.5	±20%	240	3.03	0.017	7.50	8.5x21.0x17.0
SC6V0Z155MV-1	6.0	1.5	±20%	320	2.84	0.016	7.50	8.5x17.0x17.0
SC6V0Z205MV	6.0	2.0	±20%	180	4.04	0.020	10.00	8.5x25.0x17.0
SC6V0Z255MV	6.0	2.5	±20%	160	4.91	0.020	12.50	8.5x25.0x17.0
SC6V0Z255MV-1	6.0	2.5	±20%	240	5.00	0.020	12.50	10.0x21.0x21.0
SC6V0Z305MV	6.0	3.0	±20%	200	5.69	0.025	15.00	10.0x21.0x21.0
SC6V0Z355MV	6.0	3.5	±20%	160	6.31	0.030	17.50	10.0x21.0x21.0
SC6V0Z505MV	6.0	5	±20%	130	8.59	0.050	25.00	10.0x26.0x21.0
SC6V0Z505MV-1	6.0	5	±20%	140	8.59	0.050	25.00	13.0x22.0x26.0
SC6V0Z505MV-2	6.0	5	±20%	120	8.59	0.050	25.00	13.0x27.0x26.0
SC6V0Z755MV	6.0	7.5	±20%	140	10.86	0.065	37.50	13.0x22.0x26.0
SC6V0Z755MV-1	6.0	7.5	±20%	110	11.30	0.065	37.50	13.0x27.0x26.0
SC6V0Z106MV	6.0	10	±20%	90	14.47	0.080	50.00	13.0x27.0x26.0
SC6V0Z106MV-1	6.0	10	±20%	90	14.47	0.070	50.00	16.0x28.0x33.0
SC6V0Z156MV	6.0	15	±20%	70	20.12	0.078	75.00	16.0x33.0x33.0

■Maximum Peak Current：Is the current taking 1 sec. to discharge from U_R to 1/2U_R

■Body color：Blue

Supercapacitor

Dimensions & Packaging Quantity

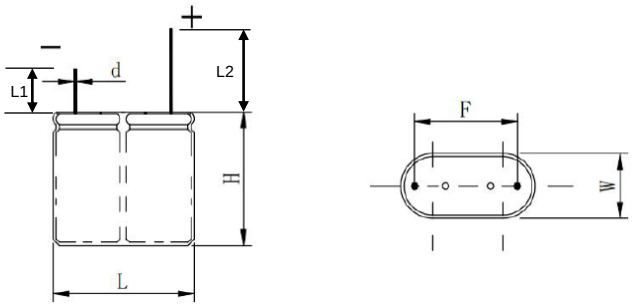

Part No.	L (mm)	W (mm)	H (mm)	F (mm)	d (mm)	L1 (mm)	L2 (mm)	Quantity(EA) Plastic Tray
SC6V0Z224ZV	13.5±1.0	6.5±1.0	13.8±2.0	9.0±0.5	0.5±0.05	19.0±2.0	24.0±2.0	80
SC6V0Z334ZV	13.5±1.0	6.5±1.0	13.8±2.0	9.0±0.5	0.5±0.05	19.0±2.0	24.0±2.0	80
SC6V0Z3349V-1	17.0±1.0	8.5±1.0	14.0±2.0	12.0±0.5	0.6±0.05	19.0±2.0	24.0±2.0	64
SC6V0Z474MV	13.5±1.0	6.5±1.0	13.8±2.0	9.0±0.5	0.5±0.05	19.0±2.0	24.0±2.0	80
SC6V0Z4749V-1	17.0±1.0	8.5±1.0	14.0±2.0	12.0±0.5	0.6±0.05	19.0±2.0	24.0±2.0	64
SC6V0Z504MV	13.5±1.0	6.5±1.0	13.8±2.0	9.0±0.5	0.5±0.05	19.0±2.0	24.0±2.0	80
SC6V0Z504MV-2	17.0±1.0	8.5±1.0	14.0±2.0	12.0±0.5	0.6±0.05	19.0±2.0	24.0±2.0	64
SC6V0Z105ZV	17.0±1.0	8.5±1.0	21.0±2.0	12.0±0.5	0.6±0.05	19.0±2.0	24.0±2.0	48
SC6V0Z105MV-1	17.0±1.0	8.5±1.0	14.0±2.0	12.0±0.5	0.6±0.05	19.0±2.0	24.0±2.0	64
SC6V0Z105MV-2	17.0±1.0	8.5±1.0	17.0±2.0	12.0±0.5	0.6±0.05	19.0±2.0	24.0±2.0	48
SC6V0Z155MV	17.0±1.0	8.5±1.0	21.0±2.0	12.0±0.5	0.6±0.05	19.0±2.0	24.0±2.0	48
SC6V0Z155MV-1	17.0±1.0	8.5±1.0	17.0±2.0	12.0±0.5	0.6±0.05	19.0±2.0	24.0±2.0	48
SC6V0Z205MV	17.0±1.0	8.5±1.0	25.0±2.0	12.0±0.5	0.6±0.05	19.0±2.0	24.0±2.0	48
SC6V0Z255MV	17.0±1.0	8.5±1.0	25.0±2.0	12.0±0.5	0.6±0.05	19.0±2.0	24.0±2.0	48
SC6V0Z255MV-1	21.0±1.0	10.0±1.0	21.0±2.0	15.5±0.5	0.6±0.05	19.0±2.0	24.0±2.0	40
SC6V0Z305MV	21.0±1.0	10.0±1.0	21.0±2.0	15.5±0.5	0.6±0.05	19.0±2.0	24.0±2.0	40
SC6V0Z355MV	21.0±1.0	10.0±1.0	21.0±2.0	15.5±0.5	0.6±0.05	19.0±2.0	24.0±2.0	40
SC6V0Z505MV	21.0±1.0	10.0±1.0	26.0±2.0	15.5±0.5	0.6±0.05	21.0±2.0	27.0±2.0	30
SC6V0Z505MV-1	26.0±1.0	13.0±1.0	22.0±2.0	18.0±0.5	0.6±0.05	22.0±2.0	28.0±2.0	32
SC6V0Z505MV-2	26.0±1.0	13.0±1.0	27.0±2.0	18.0±0.5	0.6±0.05	21.0±2.0	27.0±2.0	20
SC6V0Z755MV	26.0±1.0	13.0±1.0	22.0±2.0	18.0±0.5	0.6±0.05	22.0±2.0	28.0±2.0	32
SC6V0Z755MV-1	26.0±1.0	13.0±1.0	27.0±2.0	18.0±0.5	0.6±0.05	21.0±2.0	27.0±2.0	20
SC6V0Z106MV	26.0±1.0	13.0±1.0	27.0±2.0	18.0±0.5	0.6±0.05	21.0±2.0	27.0±2.0	20
SC6V0Z106MV-1	33.0±1.0	16.0±1.0	28.0±2.0	24.0±0.5	0.8±0.05	21.0±2.0	27.0±2.0	20
SC6V0Z156MV	33.0±1.0	16.0±1.0	33.0±2.0	24.0±0.5	0.8±0.05	21.0±2.0	27.0±2.0	16

■Environmental Characteristics

Item	Requirement		Test Condition
Operating Temperature Range	-40°C~+70°C		
Rated Operating Voltage	6.0V DC		
High Temperature Characteristics	△C	Less than or equal to 30% of the initial value	Place in the higher operating temperature environment for 16h and test in this environment
	ESR	Less than or equal to the initial value	
	Appearance	No leakage or mechanical damage	
Low Temperature Characteristics	△C	Less than or equal to 30% of the initial value	Place in the lower operating temperature environment for 2h and test in this environment
	ESR	Less than or equal to 4 times the initial value	
	Appearance	No leakage or mechanical damage	
Endurance	△C	Less than or equal to 30% of the initial value	Applied voltage：5.0V Temperature：+70±2°C Time：1000h
	ESR	Less than or equal to 4 times the initial value	
	Appearance	No leakage or mechanical damage	
Cycle Life	△C	Less than or equal to 30% of the initial value	Capacitors cycles 500000 times between rated voltage and half rated voltage under constant current at 25°C . Shelf for 5s between each charge and discharge.
	ESR	Less than or equal to 4 times the initial value	
Humidity Characteristics	△C	Less than or equal to 30% of the initial value	Temperature：+40±2°C Relative humidity：90~95%RH Test time：240h
	ESR	Less than or equal to 4 times the initial value	
	Appearance	No leakage or mechanical damage	
Temperature Cycle	△C	Less than or equal to 10% of the initial value	Temperature cycle：-40±2°C→normal temperature →+70±2°C→normal temperature Cycles：5
	Appearance	No leakage or mechanical damage	
Low Temperature Storage Characteristics	△C	Satisfies the range of 10% of the initial rating	Applied voltage：0V Temperature：-40±2°C Time：96h
	ESR	Less than or equal to 2 times the initial value	
	Appearance	No leakage or mechanical damage	
High Temperature Storage Characteristics	△C	Satisfies the range of 10% of the initial rating	Applied voltage：0V Temperature：+70±2°C Time：96h
	ESR	Less than or equal to 2 times the initial value	
	Appearance	No leakage or mechanical damage	
Self Discharge Characteristics	The self-discharge cut-off voltage is greater than or equal to 80% of the rated voltage		Charging process: normal temperature, no load, rated voltage charge 8h Placement process: temperature less than or equal to 25°C, relative humidity less than 60% RH, open 24 h
Lead strength	No damage to the outlet		DL/T 1652-2016
Solder ability	More than 3/4 of the terminal surface is covered by a tin layer		DL/T 1652-2016

■Storage Temperature: -30~50℃; Relative Humidity:<60%RH

■Shelf life: 1 years Max

Supercapacitor

■High Temperature Combined Type Supercapacitor


Specifications Value of Product

Part No.	Rated Voltage (V)	Rated Capacitance (F)	Tolerance	Max. ESR DC 25℃ (mΩ)	Maximum Peak Current (25℃<1s, A)	Leakage Current (25℃ 72h, mA)	Store energy (mWh)	Sizs WxHxL (mm)
SC5V5Z224ZH	5.5	0.22	-20%~+80%	1000	0.48	0.008	0.92	6.5x13.8x13.5
SC5V5Z334ZH	5.5	0.33	-20%~+80%	1000	0.68	0.008	1.39	6.5x13.8x13.5
SC5V5Z474MH	5.5	0.47	±20%	1000	0.88	0.008	1.97	6.5x13.8x13.5
SC5V5Z504MH	5.5	0.5	±20%	1000	0.88	0.008	2.10	6.5x13.8x13.5
SC5V5Z105MH	5.5	1.0	±20%	360	1.96	0.013	4.20	8.5x17.0x17.0
SC5V5Z155MH-2	5.5	1.5	±20%	270	3.03	0.017	6.30	8.5x21.0x17.0
SC5V5Z205MH	5.5	2.0	±20%	220	3.93	0.020	8.40	8.5x25.0x17.0
SC5V5Z205MH-1	5.5	2.0	±20%	220	3.72	0.020	8.40	8.5x21.0x17.0
SC5V5Z255MH	5.5	2.5	±20%	170	4.74	0.020	10.50	8.5x25.0x17.0
SC5V5Z255MH-1	5.5	2.5	±20%	200	4.58	0.020	10.50	10.0x21.0x21.0
SC5V5Z305MH	5.5	3.0	±20%	160	5.57	0.025	12.60	8.5x25.0x17.0
SC5V5Z305MH-1	5.5	3.0	±20%	180	5.36	0.025	12.60	10.0x21.0x21.0
SC5V5Z355MH	5.5	3.5	±20%	160	6.31	0.030	14.70	10.0x21.0x21.0
SC5V5Z505MH	5.5	5.0	±20%	120	7.86	0.050	21.01	13.0x22.0x26.0
SC5V5Z505MH-2	5.5	5.0	±20%	120	7.86	0.050	21.01	10.0x26.0x21.0
SC5V5Z755MH	7.5	5.0	±20%	120	10.86	0.065	31.51	13.0x22.0x26.0
SC5V5Z755MH-1	7.5	5.0	±20%	110	10.06	0.065	31.51	13.0x27.0x26.0
SC5V5Z106MH	5.5	10	±20%	90	13.75	0.060	42.01	16.0x28.0x33.0
SC5V5Z106MH-1	5.5	10	±20%	100	12.50	0.080	42.01	13.0x27.0x26.0
SC5V5Z156MH	5.5	15	±20%	70	17.55	0.078	63.02	16.0x33.0x33.0
SC5V5Z256MH	5.5	25	±20%	60	25.00	0.100	105.03	18.0x43.0x37.0

■Maximum Peak Current：Is the current taking 1 sec. to discharge from U_R to 1/2U_R

■Body color：Black

Dimensions & Packaging Quantity

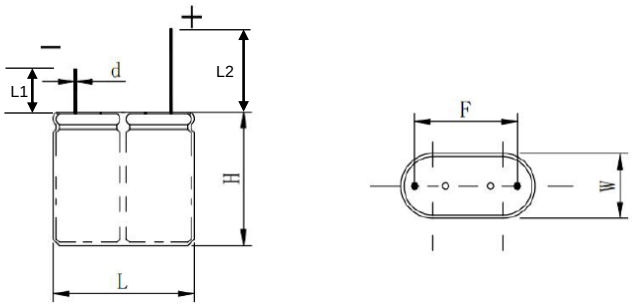

Part No.	W (mm)	H (mm)	L (mm)	F (mm)	d (mm)	L1 (mm)	L2 (mm)	Quantity(EA) Plastic Tray	Quantity(EA) Plastic Bag
SC5V5Z224ZH	6.5±1.0	13.8±2.0	13.5±1.0	9.0±0.5	0.5±0.05	19.0±2.0	24.0±2.0	80	-
SC5V5Z334ZH	6.5±1.0	13.8±2.0	13.5±1.0	9.0±0.5	0.5±0.05	19.0±2.0	24.0±2.0	80	-
SC5V5Z474MH	6.5±1.0	13.8±2.0	13.5±1.0	9.0±0.5	0.5±0.05	19.0±2.0	24.0±2.0	80	-
SC5V5Z504MH	6.5±1.0	13.8±2.0	13.5±1.0	9.0±0.5	0.5±0.05	19.0±2.0	24.0±2.0	80	
SC5V5Z105MH	8.5±1.0	17.0±2.0	17.0±1.0	12.0±0.5	0.6±0.05	19.0±2.0	24.0±2.0	48	
SC5V5Z155MH-2	8.5±1.0	21.0±2.0	17.0±1.0	12.0±0.5	0.6±0.05	19.0±2.0	24.0±2.0	48	
SC5V5Z205MH	8.5±1.0	25.0±2.0	17.0±1.0	12.0±0.5	0.6±0.05	19.0±2.0	24.0±2.0	48	-
SC5V5Z205MH-1	8.5±1.0	21.0±2.0	17.0±1.0	12.0±0.5	0.6±0.05	19.0±2.0	24.0±2.0	48	
SC5V5Z255MH	8.5±1.0	25.0±2.0	17.0±1.0	12.0±0.5	0.6±0.05	19.0±2.0	24.0±2.0	48	-
SC5V5Z255MH-1	10.0±1.0	21.0±2.0	21.0±1.0	15.5±0.5	0.6±0.05	19.0±2.0	24.0±2.0	40	
SC5V5Z305MH	8.5±1.0	25.0±2.0	17.0±1.0	12.0±0.5	0.6±0.05	19.0±2.0	24.0±2.0	48	
SC5V5Z305MH-1	10.0±1.0	21.0±2.0	21.0±1.0	15.5±0.5	0.6±0.05	19.0±2.0	24.0±2.0	40	
SC5V5Z355MH	10.0±1.0	21.0±2.0	21.0±1.0	15.5±0.5	0.6±0.05	19.0±2.0	24.0±2.0	40	-
SC5V5Z505MH	13.0±1.0	22.0±2.0	26.0±1.0	18.0±0.5	0.6±0.05	22.0±2.0	28.0±2.0	32	-
SC5V5Z505MH-2	10.0±1.0	26.0±2.0	21.0±1.0	15.5±0.5	0.6±0.05	21.0±2.0	27.0±2.0	30	
SC5V5Z755MH	13.0±1.0	22.0±2.0	26.0±1.0	18.0±0.5	0.6±0.05	22.0±2.0	28.0±2.0	32	
SC5V5Z755MH-1	13.0±1.0	27.0±2.0	26.0±1.0	18.0±0.5	0.6±0.05	21.0±2.0	27.0±2.0	20	
SC5V5Z106MH	16.0±1.0	28.0±2.0	33.0±1.0	24.0±0.5	0.8±0.05	21.0±2.0	27.0±2.0	20	-
SC5V5Z106MH-1	13.0±1.0	27.0±2.0	26.0±1.0	18.0±0.5	0.6±0.05	21.0±2.0	27.0±2.0	20	
SC5V5Z156MH	16.0±1.0	33.0±2.0	33.0±1.0	24.0±0.5	0.8±0.05	21.0±2.0	27.0±2.0	16	
SC5V5Z256MH	18.0±1.0	43.0±2.0	37.0±1.0	26.0±0.5	0.8±0.05	23.0±2.0	28.0±2.0	-	40






■Environmental Characteristics

Item	Requirement		Test Condition
Operating Temperature Range	-40°C~+85°C		
Rated Operating Voltage	5.5V DC		
High Temperature Characteristics	△C	Less than or equal to 30% of the initial value	Place in the higher operating temperature environment for 16h and test in this environment
	ESR	Less than or equal to the initial value	
	Appearance	No leakage or mechanical damage	
Low Temperature Characteristics	△C	Less than or equal to 30% of the initial value	Place in the lower operating temperature environment for 2h and test in this environment
	ESR	Less than or equal to 4 times the initial value	
	Appearance	No leakage or mechanical damage	
Endurance	△C	Less than or equal to 30% of the initial value	Applied voltage：5.0V Temperature：+85±2°C Time：1000h
	ESR	Less than or equal to 4 times the initial value	
	Appearance	No leakage or mechanical damage	
Cycle Life	△C	Less than or equal to 30% of the initial value	Capacitors cycles 500000 times between rated voltage and half rated voltage under constant current at 25°C . Shelf for 5s between each charge and discharge.
	ESR	Less than or equal to 4 times the initial value	
Humidity Characteristics	△C	Less than or equal to 30% of the initial value	Temperature：+40±2°C Relative humidity：90~95%RH Test time：240h
	ESR	Less than or equal to 4 times the initial value	
	Appearance	No leakage or mechanical damage	
Temperature Cycle	△C	Less than or equal to 10% of the initial value	Temperature cycle：-40±2°C→normal temperature →+85±2°C→normal temperature Cycles：5
	Appearance	No leakage or mechanical damage	
Low Temperature Storage Characteristics	△C	Satisfies the range of 10% of the initial rating	Applied voltage：0V Temperature：-40±2°C Time：96h
	ESR	Less than or equal to 2 times the initial value	
	Appearance	No leakage or mechanical damage	
High Temperature Storage Characteristics	△C	Satisfies the range of 10% of the initial rating	Applied voltage：0V Temperature：+85±2°C Time：96h
	ESR	Less than or equal to 2 times the initial value	
	Appearance	No leakage or mechanical damage	
Self Discharge Characteristics	The self-discharge cut-off voltage is greater than or equal to 80% of the rated voltage		Charging process: normal temperature, no load, rated voltage charge 8h Placement process: temperature less than or equal to 25°C, relative humidity less than 60% RH, open 24 h
Lead strength	No damage to the outlet		DL/T 1652-2016
Solder ability	More than 3/4 of the terminal surface is covered by a tin layer		DL/T 1652-2016

■Storage Temperature: -30~50℃; Relative Humidity:<60%RH

■Shelf life: 1 years Max

■Measuring Method

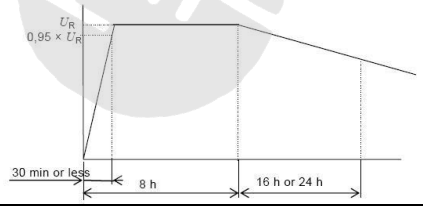
Capacitance	Measurement by Permanent electrotransport : 1.DC voltage of constant current/constant voltage source is set as rated voltage (UR). 2.Set the constant current value of the constant current discharge device. 3.Switch the switch S to dc power supply, and charge at constant voltage for 30min after the constant current/constant voltage source reaches the rated voltage. 4.After charging for 30min, switch S is changed to the constant exile device to discharge with constant current. 5.Measure the time t1 and t2 of the voltage from U1 to U2 at both ends of the capacitor, as shown in the figure, and calculate the capacitance value according to the following equation   $C = \frac{I \times (t_2 - t_1)}{U_1 - U_2}$
Resistance	AC impedance measurement The circuit as shown in the figure below is used for measurement  Capacitor resistance Ra shall be computed by the type: $R_a = \frac{U}{I}$ Ra ac impedance (Ω); Effective value of U ac voltage (V R.M.S); Effective value of I ac current (V R.M.S).
Leakage Current	DC leakage current measurement principle is as follows  1.Discharge: before the measurement begins, the capacitor should be fully discharged.The discharge process lasts from 1h to 24h. 2. Leakage current shall be measured at rated temperature and rated voltage (UR).The charging voltage reached 95% after the maximum 30min charging time. The charging time was selected from 30min ,1h , 2h , 4h , 8h , 12h , 24h , 48h , 72h and shall be specified in the detail specification 3.Stable power supply, such as dc stabilized power supply, should be used. 4. through the protection under 1000 Ω resistance to capacitor voltage
Self discharge	Before the measurement begins, the capacitor should be fully discharged. The discharge process lasts from 1h to 24h. The rated voltage U should be directly applied at both ends of the capacitor, without protection resistance. Capacitors should be placed at standard ambient temperature and pressure for 24 hours. DC voltmeter internal resistance should be greater than 1 MΩ. 

■Soldering Condition

1. The welding condition of the proposed product is flow welding, heat shock will decrease electric performance of cell, even cause swelling, leakage or crack

2. Manual soldering temperature should not exceed 350°C, soldering time should not exceed 4s. The temperature of wave soldering is recommended to be lower than 260 ℃, and the maximum temperature of capacitor body in the welding process shall not exceed 120 ℃, and the duration shall be less than 10s, while preheating temperature should be limited to less than 105°C and maximum preheating time of 60 seconds for PC boards 0.8mm or thicker

3. Carry out low-temperature welding in accordance with the above welding conditions within a short time,as shown below：

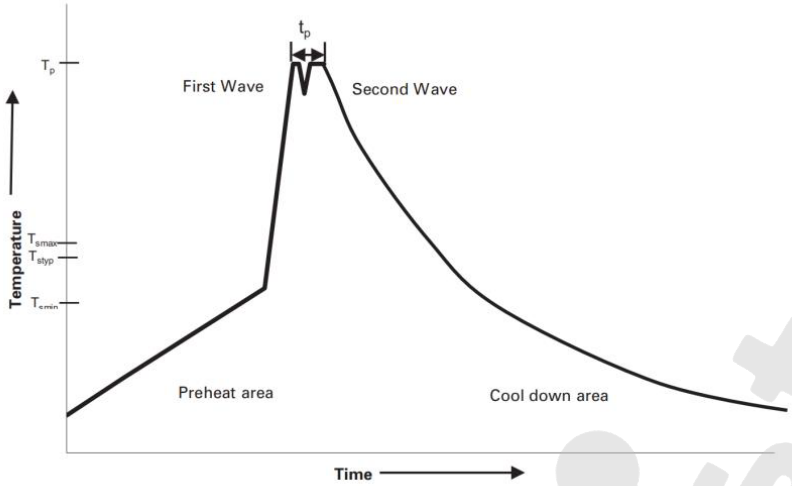

■Cautions For Use

1.Polarity problem of supercapacitor

Unlike ordinary electrolytic capacitors or batteries, the anode and cathode of supercapacitors are made of the same material, so there is no polarity in theory. However, the polarity indicated by super capacitors is formulated by the manufacturer in the production process. When the capacitor is used carelessly in the short-term reverse operation, it will not cause substantial damage to the capacitor. If adjusted to a positive direction, it can be guaranteed to be used, but it cannot be used in the long-term reverse operation, which will result in the rapid attenuation of capacitor life characteristics.Unlike supercapacitors, lithium-ion capacitors have the same polarity as electrolytic capacitors or batteries. Careless short-term reverse use during use will cause substantial damage to lithium-ion capacitors, which may lead to gas production, leakage, explosion or other question.


2.On the issue of supercapacitor charging

Charging of supercapacitors requires dc voltage which does not exceed rated voltage, and various charging methods such as current limit, constant current, constant power and constant voltage can be adopted. Supercapacitors can be charged by lowering the voltage of the charging power supply until the capacitors are full enough to maintain voltage balance. Lithium-ion capacitors capacitors can be charged in various ways such as current limiting, constant current, constant power, and constant voltage. During charging, the charging power supply voltage may be pulled down until the capacitor is fully charged to maintain voltage balance.

3.The problem of internal resistance and capacity of supercapacitors

In the process of charging and discharging, super capacitor resistance caused by the IR drop, lose efficiency of capacitor charging and discharging, so the size of capacitor resistance to a certain extent, determines the actor bad of character of capacitor, due to the internal resistance of the super capacitor than normal capacitors, in the process of communication charge and discharge circuit or high frequency, capacitor will fever, cause life decay quickly, which is the cause of the super capacitor only commonly used in dc.

Compared with ordinary capacitors, supercapacitors have a larger time constant, so the charge-discharge time is relatively long, and because of this, it is not suitable for continuous large current to work frequently, which will cause rapid attenuation of the heating performance. The frequency characteristic of supercapacitors is that the response time of positive and negative ions in the micro pores of carbon electrode is long at high frequency. Instead of measuring capacitors' ac capacity, the mAh method based on battery measurement is used.

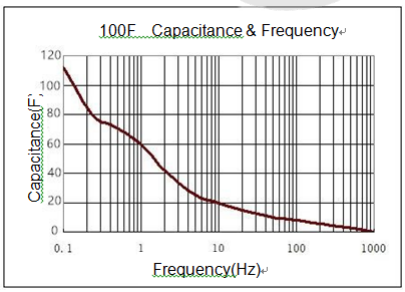


Expcept Lithium ion

4.Transport and storage

Should prevent products be affected with damp be affected with damp in product transportation, storage temperature should be - 30 ℃ to 50 ℃, relative humidity less than 60%, the maximum humidity no more than 85%, otherwise it will cause capacitance performance degradation of be affected with damp be affected with damp or rust.
Lithium ion :The Super Capacitor should be stored at room temperature, charged to about 50% ~ 80% of capacity; We recommend that Asymmetry Super Capacitor be charged about once per half a year to prevent over discharge.
Should prevent products be affected with damp be affected with damp in product transportation, storage temperature should be -20 ℃ to 50 ℃, relative humidity less than 65%, the maximum humidity no more than 65%, otherwise it will cause capacitance performance degradation of be affected with damp be affected with damp or rust.

5.Installation and welding

When the supercapacitor is used on the double-sided circuit board, it should be noted that the connection cannot pass through the reach of the capacitor, otherwise the product will be short circuit overvoltage and the capacitor will be damaged. During installation and after installation, do not twist or tilt the capacitor by force. Do not pull the lead by force. Break the needle and weld after bending. In the welding process to avoid overheating of the capacitor (1.6 mm of printed circuit board, the welding should be 260 ℃, when time is not more than 5 s), after welding, circuit board and the capacitor to clean in the net.

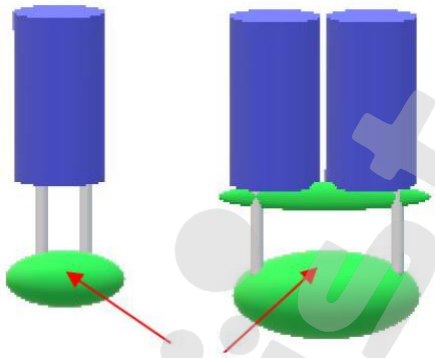

try not to wire here

6.Short circuit judgment of supercapacitor

The short circuit capacitance shall not be charged or discharged. The dc voltage shall be applied between the positive and negative terminals of the capacitance. The capacitance voltage shall not be increased When charging, it is normal to use ohm gauge (short circuit block) indicator as short circuit state. Capacitance is short circuit and it cannot be determined. It should be observed whether the resistance value increases or not.

7.Series and parallel operation problem
When the same super capacitor is used in series, the total voltage = series number * monomer withstand voltage; Total capacity = unit capacity Total energy = series number x monomer capacity, total internal resistance = series number x monomer resistance.
There is a problem of voltage balancing between three or more monomers in series, so it is necessary to consider adopting equalizing circuit to ensure that the capacitance cannot be used over voltage during long-term use, thus causing capacitor life attenuation and damage.
Supercapacitors of different specifications cannot be used in series.
When the super capacitors are used in parallel, they can be connected in parallel with different capacitance values and charged by the same voltage. However, it is necessary to pay attention to the current balance between the capacitors and to isolate each other, so as to avoid reverse charging due to the potential difference after discharge.

8.For other problems in use, please consult the manufacturer or refer to the relevant technical data of the instructions for the use of supercapacitors.

9.Handling of leakage situation
Skin contact: rinse skin thoroughly with soap and water;
Eye contact: flush with flowing water or normal saline and seek medical advice; Absorb: immediately rinse with water and seek medical advice;
If the supercapacitor is found to be overheating or smelling, the power supply and load connected to the supercapacitor should be disconnected immediately to cool it, and the supercapacitor should be treated properly so that no face or hand contact with the supercapacitor is allowed.

REVISION HISTORY

REVISION	DATE	CHANGE NOTIFICATION	DESCRIPTION
Version B	Apr. 10,2025	-	- Add Storage conditions and Shelf life.
Version B1	May. 26,2025	-	- Modify High Temperature Coin Type Environmental Characteristics Test Condition of Endurance