Data Sheet

Customer:	
Product:	Metal Film Precision MELF Resistor-CSRV Series
Size:	0102/0204/0207
Issued Date:	02-Feb-26
Edition:	REV.C5

RoHS Compliant

HONG KONG HELISTO INDUSTRIAL LIMITED
香港海利斯特实业有限公司

SHENZHEN HELISTO TECHNOLOGYCOLTD
深圳市海利斯特科技有限公司

ADD:5/F., A Block, Hongdu Industrial Park, Fanshen Road, 45 Area, Baoan, Shenzhen, China
TEL:+86-755-29741555 29749555
FAX:+86-755-29742111
E-mail:donnyhai@helisto.com
www.Helisto.com

Produced by (QC)	Checked (QC)	Approved by (QC)	Prepared by (Sales)	Accepted by (Customer)
02-Feb-26	02-Feb-26	02-Feb-26		
Alice Hsiao	***Susan Huang***	***Susan Huang***		

Metal Film Precision MELF Resistor



■Features


- Thin film technology
- AEC-Q200 Compliance
- Excellent overall stability
- Sn termination on Ni barrier layer
- Tight tolerance down to ±0.1%
- Extremely low TCR down to ±5 PPM/℃
- High power rating up to 1 Watts
- SMD enabled structure
- Lead-free and RoHS compliant

■Applications

- Automotive(non-safety parts)
- Industrial
- Telecommunication
- Medical Equipment
- Measurement/Testing Equipment

TECHNICAL SPECIFICATIONS							
DESCRIPTION	**CSRV0102**			**CSRV0204**		**CSRV0207**	
Resistance range	0.22Ω-1MΩ; 0Ω			0.1Ω-10MΩ; 0Ω		0.1Ω-10MΩ; 0Ω	
Resistance tolerance	±5%;±1%;±0.5%;±0.25%;±0.1%						
Temperature coefficient	±100ppm/℃; ±50ppm/℃; ±25ppm/℃; ±15ppm/℃			±100ppm/℃; ±50ppm/℃; ±25ppm/℃; ±15ppm/℃; ±10ppm/℃; ±5ppm/℃			
Operation mode	Standard	High power		Standard	High power	Standard	High power
Power rating P_{70}	1/8W	1/5W	0.3W	1/4W	2/5W	1/2W	1W
Operating voltage $U_{max.}$	150V	200V	200V	200V	200V	300V	350V
Operating temperature range	-55℃~155℃						
Max. resistance change at P70 for resistance range, ΔR/R max., after 1000 h	≦0.5%			≦0.5%		≦0.5%	

■Construction & Dimension

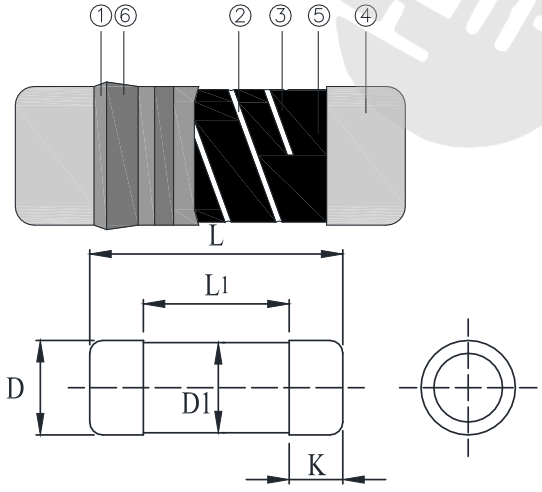

①	Insulation Coating	④	Electrode Cap
②	Trimming Line	⑤	Resistor Layer
③	Ceramic Rod	⑥	Marking

Type	L (mm)	$L_{1\ min.}$ (mm)	ΦD (mm)	$ΦD_1$ (mm)	K (mm)	Weight 1,000EA (g)
CSRV0102	2.20±0.10	1.1	1.10±0.10	D +0/-0.15	0.45±0.05	7.7
CSRV0204	3.50±0.2	1.7	1.40±0.15	D +0/-0.2	0.8±0.1	18.7
CSRV0207	5.90±0.2	2.9	2.20±0.20	D +0/-0.2	1.3±0.1	80.9


■Part Numbering

Part Number：CSRV0204DTDV1001
Part Number：CSRV0204JT-VR0R0

C	S	R	V	0	2	0	4	D	T	D	V	1	0	0	1
C	S	R	V	0	2	0	4	J	T	–	V	R	0	R	0


Product Type	Dimensions (L×ΦD)	Resistance Tolerance	Packaging Code	TCR (PPM/℃)	Power Rating	Resistance
CSRV	0102: 2.2x1.1 0204: 3.5x1.4 0207: 5.9x2.2	B: ±0.1% C: ±0.25% D: ±0.5% F: ±1% J: ±5% or Jumper	T: 7" Taping Reel S:7" Taping Reel, Antistatic Tape※ W:13" Taping Reel M:13" Taping Reel, Antistatic Tape※	S: ±5 B: ±10 N: ±15 C: ±25 D: ±50 E: ±100 -: Jumper	T: 1W U: 1/2W V: 1/4W G: 2/5W P: 1/5W W: 1/8W L: 0.3W	0010: 1Ω 0100: 10Ω 2201: 2200Ω 1001: 1KΩ 1004: 1MΩ R050: 0.05Ω 22R1: 22.1Ω R0R0: 0Ω

■Recommend Land Pattern

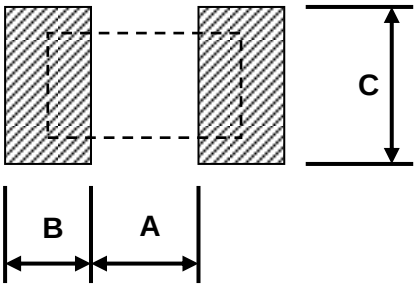


Type	A (mm)	B (mm)	C (mm)
CSRV0102	1.0	0.8	1.5
CSRV0204	1.6	1.2	1.6
CSRV0207	3.0	1.7	2.4

■Derating Curve

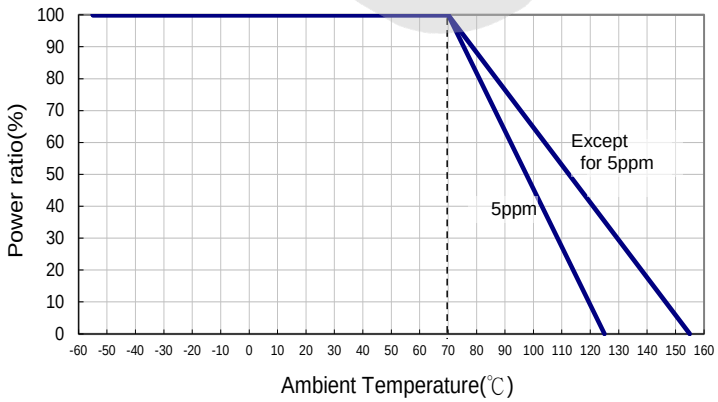

■Soldering Condition (Ref. IPC/JEDEC J-STD-020 & J-STD-002)

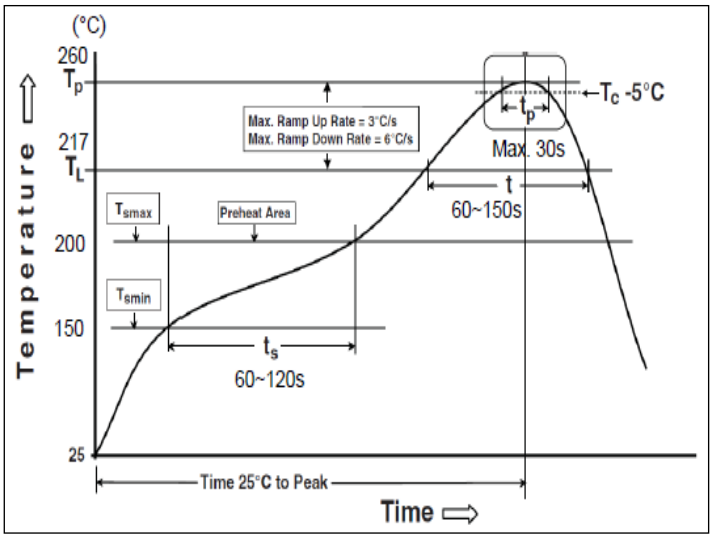

Reflow Profiles	
Profile Feature	**Pb-Free Assembly**
Preheat Min. Temperature (Tsmin) Max Temperature (Tsmax) Preheating time (ts) from (Tsmin to Tsmax)	 150 °C 200 °C 60-120 seconds
Ramp-up rate (T_L to Tp)	3 °C/second max.
Liquidous temperature (T_L) Time (t_L) maintained above T_L	217 °C 60-150 seconds
Min. Peak temperature (Tp min)	235°C
Max. Peak temperature (Tp max)	260°C
Time (tp) within 5 °C of the specified classification temperature (Tc)	30 seconds max.
Ramp-down rate (Tp to T_L)	6 °C/second max.
Time 25 °C to peak temperature	8 minutes max.

■Standard Electrical Specifications

Item / Type	Power Rating at 70°C	Operating Temp. Range	Max. Operating Voltage	Max. Overload Voltage	Resistance Range ±0.1% (E24,E96)	±0.25% (E24,E96)	±0.5% (E24,E96)	±1% (E24,E96)	±5% (E24)	TCR (PPM/°C)
0102	1/8W	-55 ~ +155°C	150V	300V	49.9Ω-56KΩ				-	±15
					100Ω-82KΩ		4.02Ω-200KΩ	4.02Ω-390KΩ	-	±25
					-		1Ω-1MΩ	0.22Ω-1MΩ		±50
					-			0.22Ω-1MΩ		±100
0204	1/4W	-55 ~ +125°C	200V	400V	10Ω-332KΩ		-			±5
		-55 ~ +155°C	200V	400V	10Ω-20KΩ				-	±10
					10Ω-300KΩ				-	±15
					10Ω-1MΩ		10Ω-3.4MΩ	1Ω-3.4MΩ		±25
					10Ω-1MΩ		1Ω-3.4MΩ	0.2Ω-10MΩ		±50
					-			0.1Ω-10MΩ		±100
0207	1/2W	-55 ~ +125°C	300V	600V	10Ω-332KΩ		-			±5
		-55 ~ +155°C	300V	600V	10Ω-20KΩ				-	±10
					10Ω-300KΩ				-	±15
					10Ω-1MΩ		10Ω-3.4MΩ	1Ω-3.4MΩ		±25
					10Ω-1MΩ		1Ω-3.4MΩ	0.2Ω-10MΩ		±50
					-			0.1Ω-10MΩ		±100

■High Power Rating Electrical Specifications

Item / Type	Power Rating at 70°C	Operating Temp. Range	Max. Operating Voltage	Max. Overload Voltage	Resistance Range ±0.1% (E24,E96)	±0.25% (E24,E96)	±0.5% (E24,E96)	±1% (E24,E96)	±5% (E24)	TCR (PPM/°C)
0102	1/5W 0.3W	-55 ~ +155°C	200V	400V	49.9Ω-56KΩ				-	±15
					100Ω-82KΩ		4.02Ω-200KΩ	4.02Ω-390KΩ	-	±25
					-		1Ω-1MΩ	0.22Ω-1MΩ		±50
					-			0.22Ω-1MΩ		±100
0204	2/5W	-55 ~ +125°C	200V	400V	10Ω-332KΩ		-			±5
		-55 ~ +155°C	200V	400V	10Ω-20KΩ				-	±10
					10Ω-300KΩ				-	±15
					10Ω-1MΩ		10Ω-3.4MΩ	1Ω-3.4MΩ		±25
					10Ω-1MΩ		1Ω–3.4MΩ	0.2Ω-10MΩ		±50
					-			0.1Ω-10MΩ		±100
0207	1W	-55 ~ +125°C	350V	700V	10Ω-332KΩ		-			±5
		-55 ~ +155°C	350V	700V	10Ω-20KΩ				-	±10
					10Ω-300KΩ				-	±15
					10Ω-1MΩ		10Ω-3.4MΩ	1Ω-3.4MΩ		±25
					10Ω-1MΩ		1Ω-3.4MΩ	0.2Ω-10MΩ		±50
					-			0.1Ω-10MΩ		±100

Operating Voltage=$\sqrt{(P*R)}$ or Max. Operating Voltage listed above, whichever is lower.
Overload Voltage=2.5*$\sqrt{(P*R)}$ or Max. Overload Voltage listed above, whichever is lower.
RCWV(Rated Continuous Working Voltage)=$\sqrt{(P*R)}$ or Max. Operating Voltage whichever is lower.
■ Viking is capable of manufacturing the optional spec based on customer's requirement.

■Jumper Specifications

Item / Type	Power Rating	Operating Temp. Range	Resistance	Rated Current
CSRV0102	1/8W	-55 ~ +155°C	0Ω(<15mΩ)	2A
	1/5W			
	0.3W			
CSRV0204	1/4W	-55 ~ +155°C		3A
	2/5W			
CSRV0207	1/2W	-55 ~ +155°C		5A
	1W			

■Environmental Characteristics

Item	Requirement		Test Method
	5% and Below	Jumper	
Temperature Coefficient of Resistance (T.C.R.)	As Spec		**JIS-C-5201-1 4.8** **IEC-60115-1 4.8** At 25°C/-55°C and 25°C/+125°C, 25°C is the reference temperature 5ppm: At 25°C/-10°C and 25°C/+85°C, 25°C is the reference temperature
Short Time Overload	10Ω-270KΩ: ±(0.1%+0.01Ω) <10Ω & >270KΩ: ±(0.15%+0.01Ω) 0102: ±(0.15%+0.01Ω) 5ppm: ±(0.05%+0.01Ω)	<15mΩ	**JIS-C-5201-1 4.13** **IEC-60115-1 4.13** RCWV*2.5 or Max. Overload Voltage whichever is lower for 5 seconds
Insulation Resistance	≥10G		**JIS-C-5201-1 4.6** **IEC-60115-1 4.6** Max. Overload Voltage for 1 minute
Operational Life	10Ω-270KΩ: ±(0.25%+0.01Ω) <10Ω & >270KΩ: ±(0.5%+0.01Ω) 0102: ±(0.5%+0.01Ω)	<15mΩ	**MIL-STD-202 Method 108** Condition D Steady State TA=125°C at derated power. Measurement at 24±4 hours after test conclusion. 5ppm: 70±2°C, RCWV for 1000 hrs with 1.5 hrs "ON" and 0.5 hr "OFF"
Biased Humidity	<10Ω: ±(1%+0.01Ω) 10Ω-270KΩ: ±(0.5%+0.01Ω) >270KΩ-3.4MΩ: ±(1%+0.01Ω) >3.4MΩ: ±(2%+0.01Ω) 0102: ±(2%+0.01Ω)	<15mΩ	**MIL-STD-202 Method 103** 1000 hrs 85°C/85%RH 10% of operating power. (≦100 V)
High Temperature Exposure	10Ω-270KΩ: ±(0.25%+0.01Ω) <10Ω & >270KΩ: ±(1%+0.01Ω) 0102: ±(1%+0.01Ω)	<15mΩ	**MIL-STD-202 Method 108** at +125°C/+155°C for 1000 hrs
Board Flex	10Ω-270KΩ: ±(0.1%+0.01Ω) <10Ω & >270KΩ: ±(0.5%+0.01Ω) 0102: ±(0.5%+0.01Ω)	<15mΩ	**AEC-Q200-005** Bending once for 60 seconds with 2mm
Solderability	95% min. coverage		**JIS-C-5201-1 4.17** **IEC-60115-1 4.17** **J-STD-002** 245±5°C for 3 seconds
Resistance to Soldering Heat	10Ω-270KΩ: ±(0.1%+0.01Ω) <10Ω & >270KΩ: ±(0.25%+0.01Ω) 0102(≧1Ω): ±(0.25%+0.01Ω) 0102(<1Ω): ±(0.50%+0.01Ω) 5ppm: ±(0.05%+0.01Ω)	<15mΩ	**MIL-STD-202 Method 210** 260±5°C for 10 seconds
Voltage Proof	No breakdown or flashover		**JIS-C-5201-1 4.7** **IEC-60115-1 4.7** 1.42 times Max. Operating Voltage for 1 minute
Leaching	Individual leaching area ≦5% Total leaching area ≦ 10%		**JIS-C-5201-1 4.18** **IEC-60068-2-58 8.2.1** 260±5°C for 30 seconds
Temperature Cycling	10Ω-270KΩ: ±(0.25%+0.01Ω) <10Ω & >270KΩ: ±(0.5%+0.01Ω) 0102: ±(1%+0.01Ω)	<15mΩ	**JESD22 Method JA-104** -55°C to +125°C, 1000 cycles
Mechanical Shock	±(0.25%+0.01Ω)	<15mΩ	**MIL-STD-202 Method 213** Wave Form: Tolerance for half sine shock pulse. Peak value is 100g's. Normal duration (D) is 6.
Vibration	±(0.5%+0.01Ω)	<15mΩ	**MIL-STD-202 Method 204** 5 g's for 20 min., 12 cycles each of 3 orientations, 10-2000 Hz
ESD	±(0.5%+0.01Ω)	<15mΩ	**AEC-Q200-002** Human body, 0102/0204:2KV; 0207:4KV
Resistance to Solvents	No visible damage on appearance and marking.		**MIL-STD-202 Method 215** Add Aqueous wash chemical - OKEM Clean or equivalent. Do not use banned solvents.

Metal Film Precision MELF Resistor


Item	Requirement		Test Method
	5% and Below	Jumper	
Terminal Strength	No broken		**AEC-Q200-006** Force of 1.8kg for 60 seconds.
Flammability	No ignition of the tissue paper or scorching or the pinewood board		**UL-94** V-0 or V-1 are acceptable. Electrical test not required.

RCWV(Rated Continuous Working Voltage)=√(P*R) or Max. Operating Voltage whichever is lower.

■Storage Temperature: 15~28°C; Humidity < 80%RH

■Shelf Life: 2 years from production date.


■Packaging

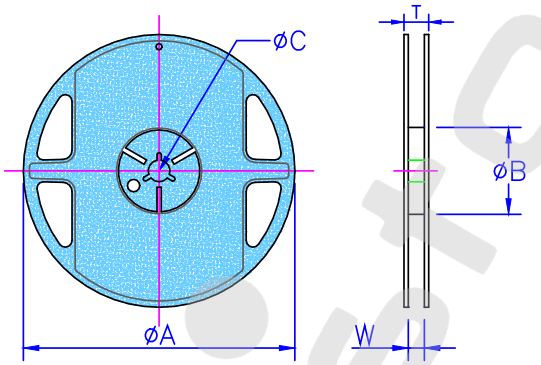

Packaging Quantity & Reel Specifications

Type	Reel Diameter	ΦA (mm)	ΦB (mm)	ΦC (mm)	W (mm)	T (mm)	Emboss Plastic Tape (EA)
CSRV0102	7 inch	178.5±1.5	60.0+1.0	13.0±0.2	9.0±0.5	12.5±0.5	3,000
	13 inch	330±1.0	100±0.5	13.0±0.2	9.5±0.5	13.5±0.5	10,000
CSRV0204	7 inch	178.5±1.5	60.0+1.0	13.0±0.2	9.0±0.5	12.5±0.5	3,000
	13 inch	330±1.0	100±0.5	13.0±0.2	9.5±0.5	13.5±0.5	10,000
CSRV0207	7 inch	178.5±1.5	60.0+1.0	13.0±0.5	13.0±0.5	15.5±0.5	2,000
	13 inch	330±1.0	99±0.5	13.5±0.5	13.4±1	17.8±1	6,000


Emboss Plastic Tape Specifications

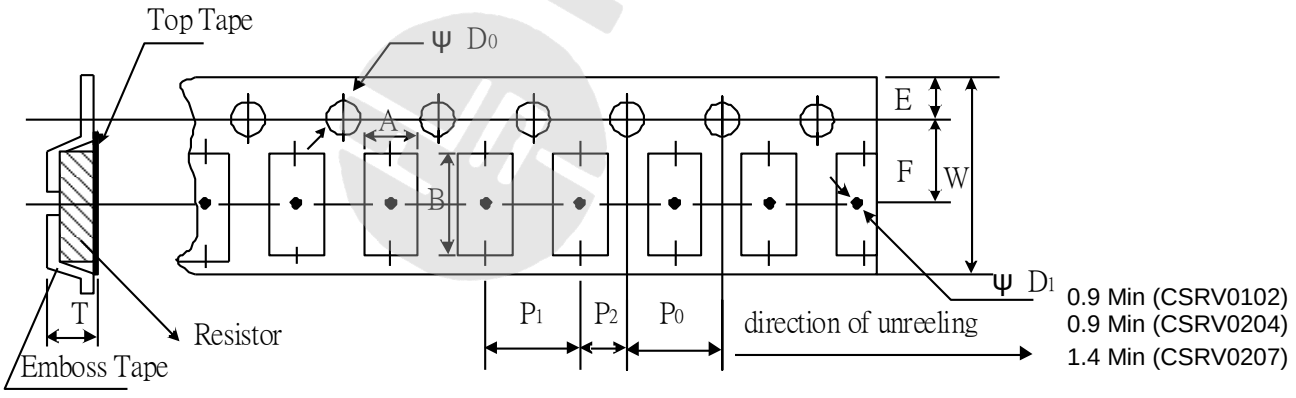


Type	A (mm)	B (mm)	W (mm)	E (mm)	F (mm)	P_0 (mm)	P_1 (mm)	P_2 (mm)	ΦD_0 (mm)	T (mm)
CSRV0102	1.30±0.20	2.40±0.20	8.0±0.10	1.75±0.10	3.50±0.05	4.00±0.10	4.00±0.10	2.00±0.05	1.50+0.10	1.50±0.10
CSRV0204	1.55±0.20	3.65±0.20	8.0±0.10	1.75±0.10	3.50±0.05	4.00±0.10	4.00±0.10	2.00±0.05	1.50+0.10	1.80±0.10
CSRV0207	2.40±0.10	6.15±0.10	12.0±0.10	1.75±0.10	5.50±0.05	4.00±0.10	4.00±0.10	2.00±0.05	1.50+0.10	2.70±0.10

■Pulse withstanding capacity


The single impulse graph is the result of the impulse of rectangular shape applied. The limit of acceptance was a shift in resistance of less than 1% from the initial value. The power applied was subject to the restrictions of the maximum permissible impulse voltage graph shown.

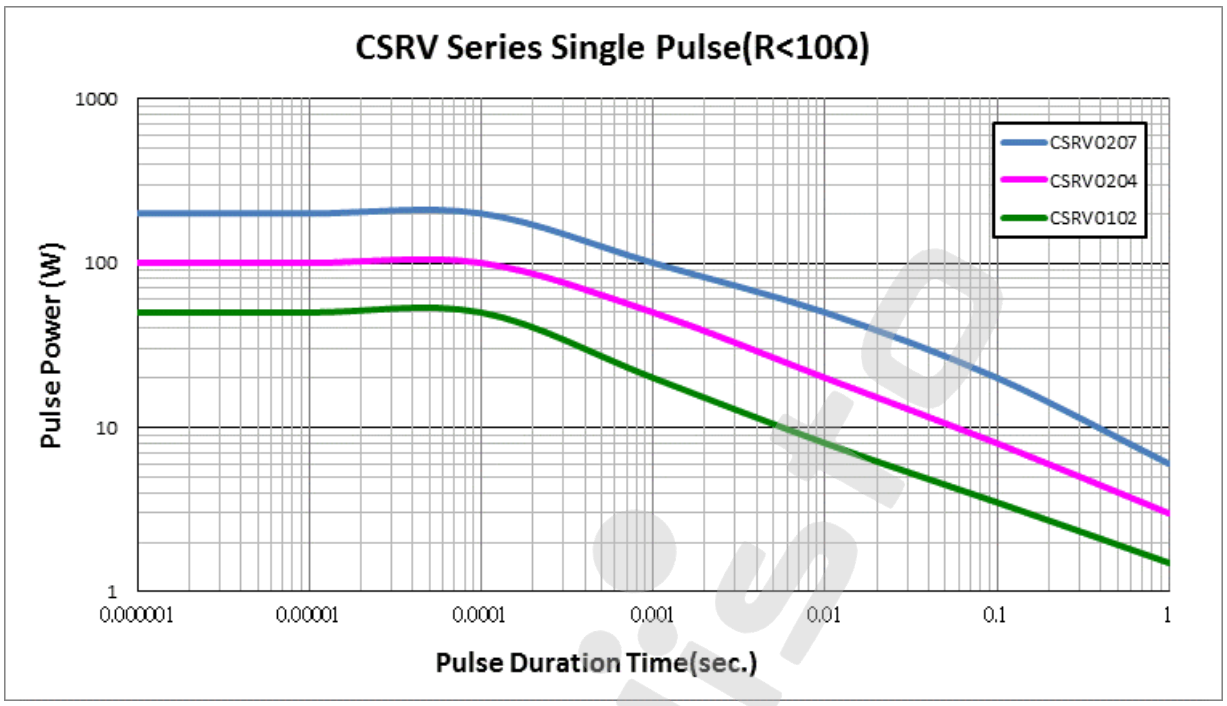


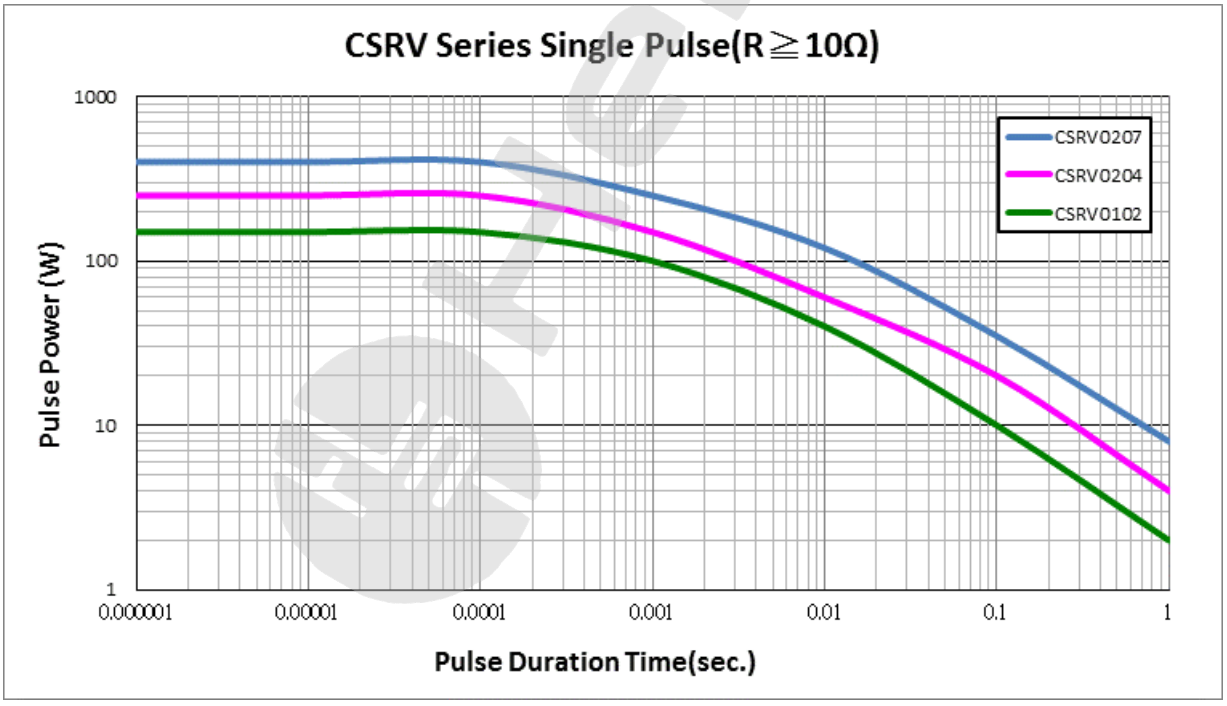

■Continuous Pulse

The continuous load graph was obtained by applying repetitive rectangular pulses where the pulse period was adjusted so that the average power dissipated in the resistor was equal to its rated power at 70°C. Again the limit of acceptance was a shift in resistance of less than 1% from the initial value.

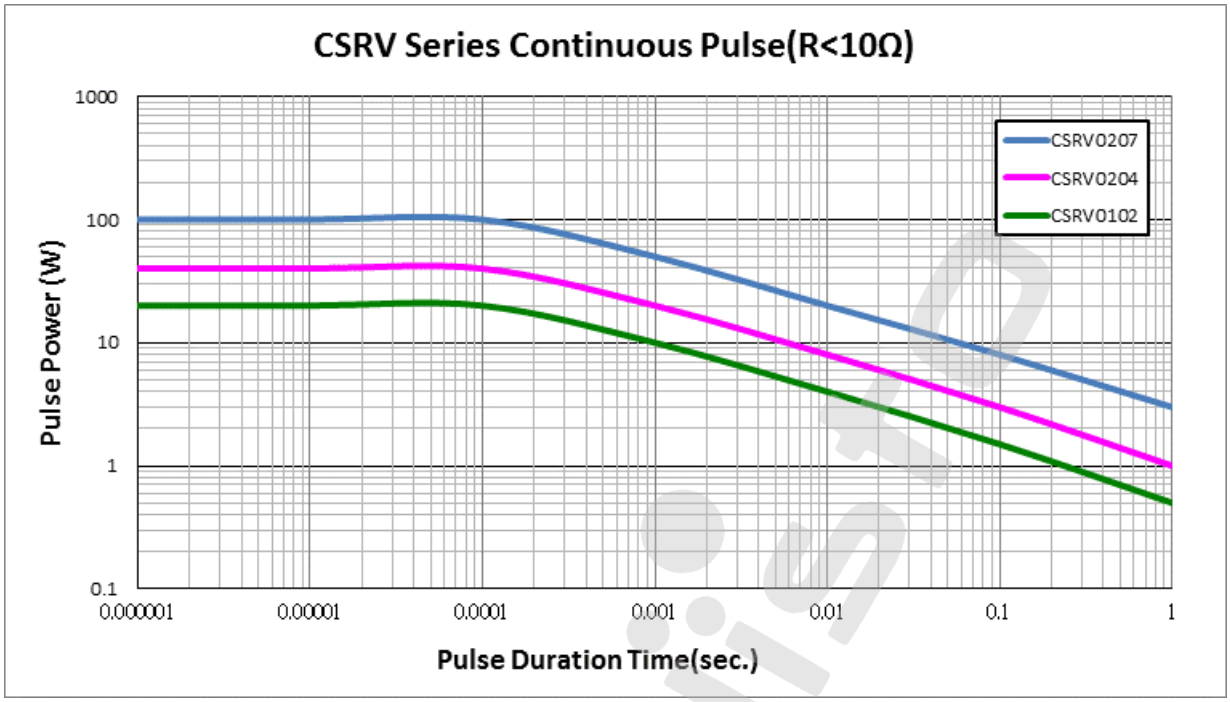

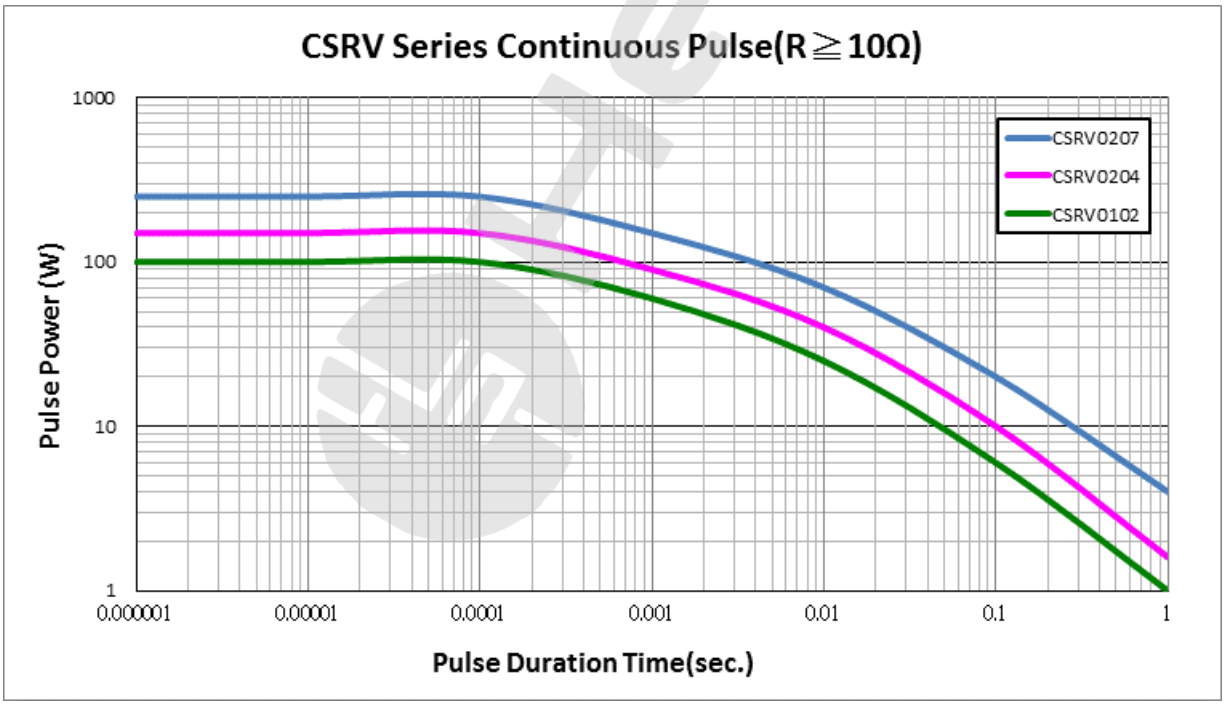


■Frequency behavior

Resistors are designed to function according to ohmic laws. This is basically true of resistors for frequencies up to 100kHz. At higher frequencies, there is an additional contribution to the impedance by an ideal resistor switched in series with a coil and both switched parallel to a capacitor. The values of the capacitance and inductance are mainly determined by the dimensions of the terminations and the conductive path length.

The environment surrounding components has a large influence on the behavior of the component on the printed-circuit board.


Frequency vs. Impedance

CSRV Series (CSRV0204)

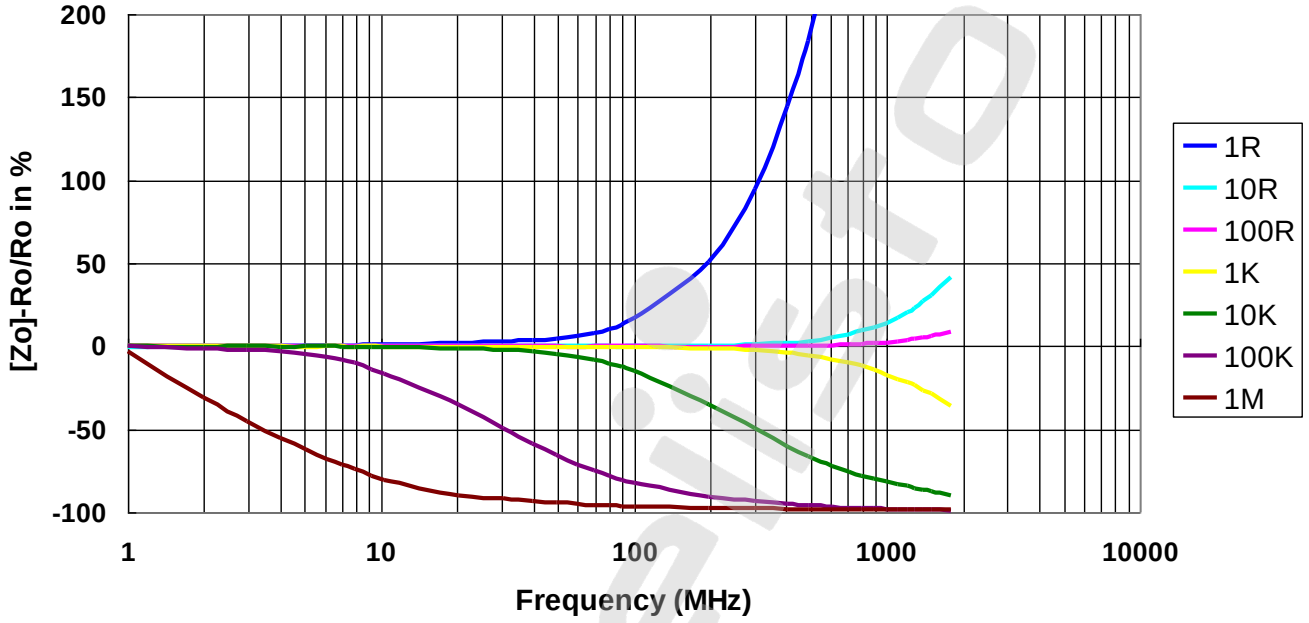


Frequency vs. Phase Angle


CSRV Series (CSRV0204)

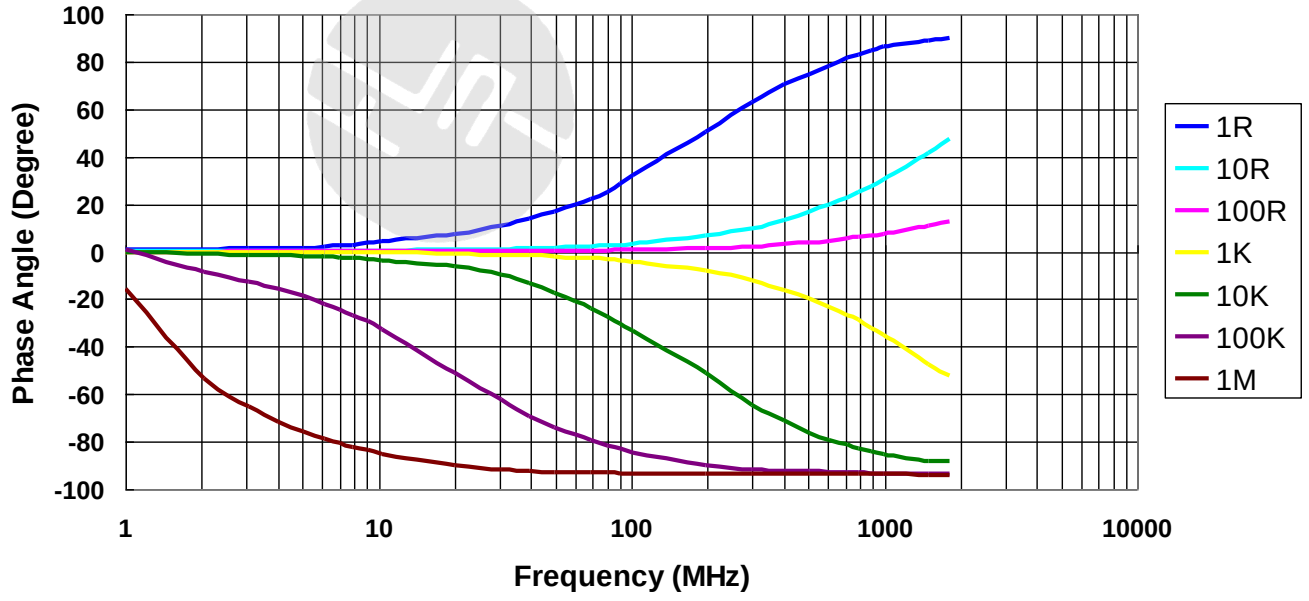

Frequency vs. Impedance
CSRV Series (CSRV0207)

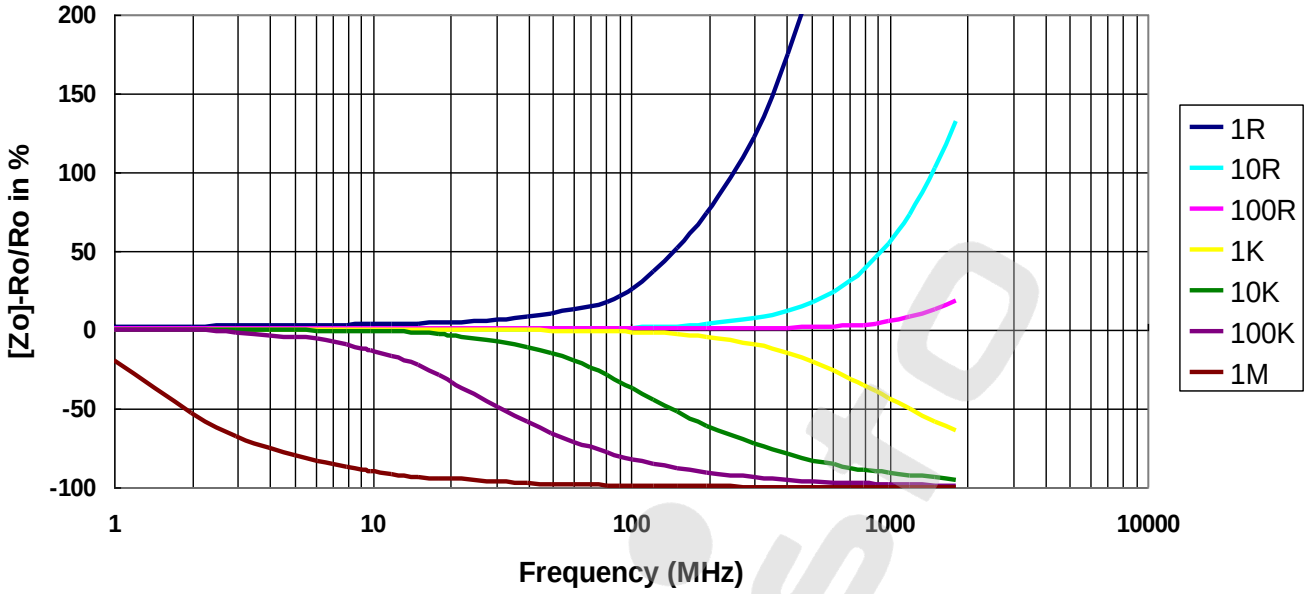


Frequency vs. Phase Angle
CSRV Series (CSRV0207)

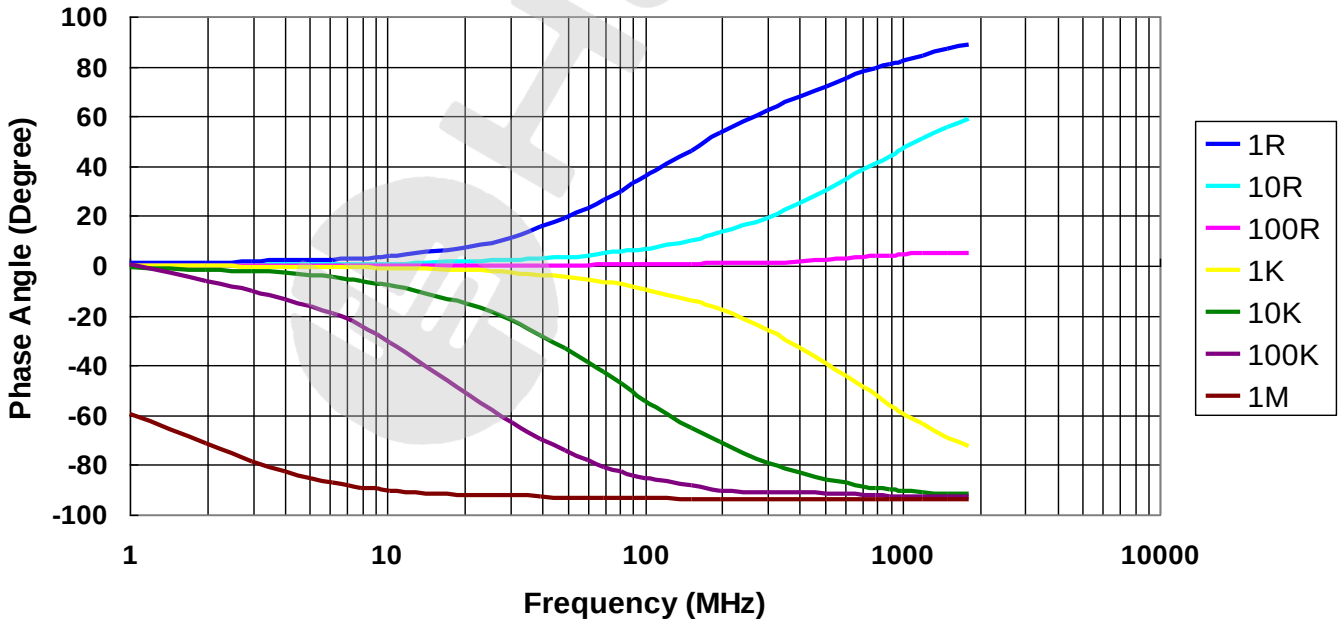


■Lightning Surge

Resistors are tested in accordance with IEC 60115-1 using both 1.2/50us and 10/700us pulse shapes. The limit of acceptance is a shift in resistance of less than 0.5% from the initial value.


1.2/50μs Lightning Surge

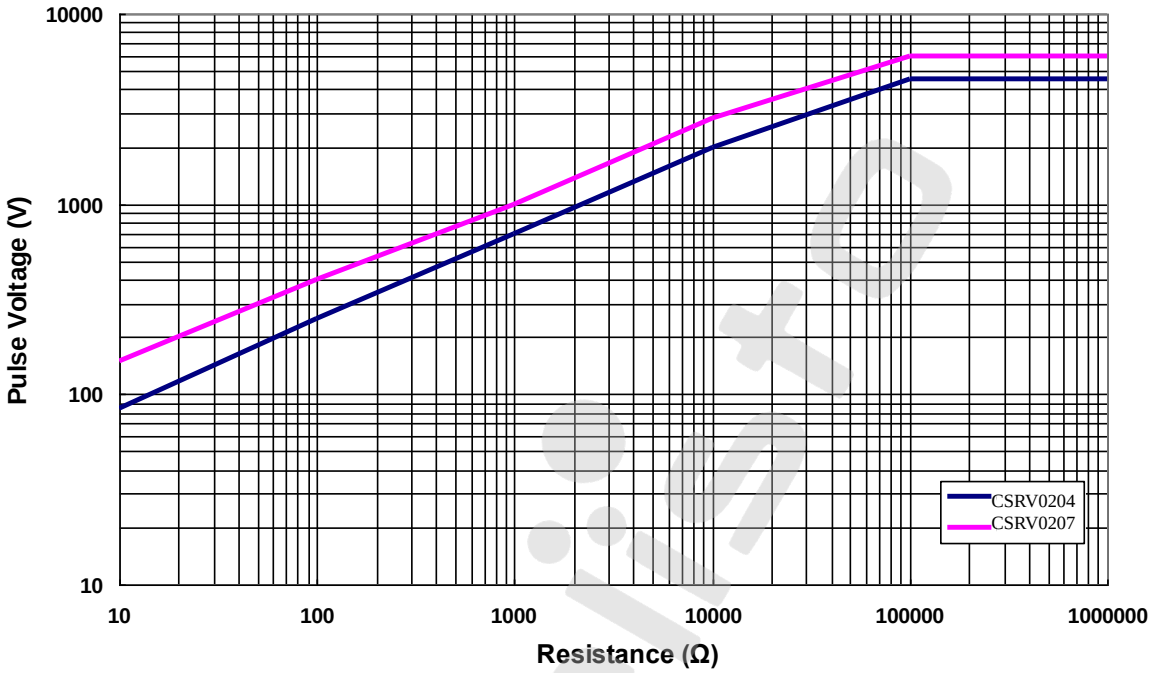


10/700μs Lightning Surge

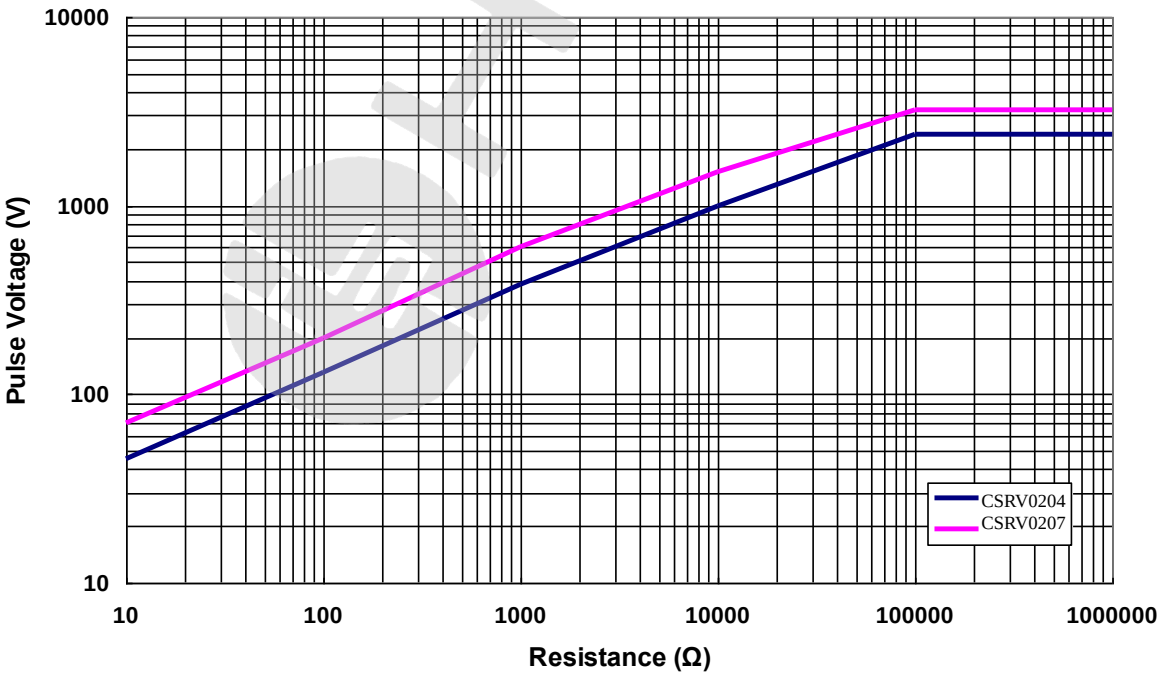


1.2/50μs Lightning Surge

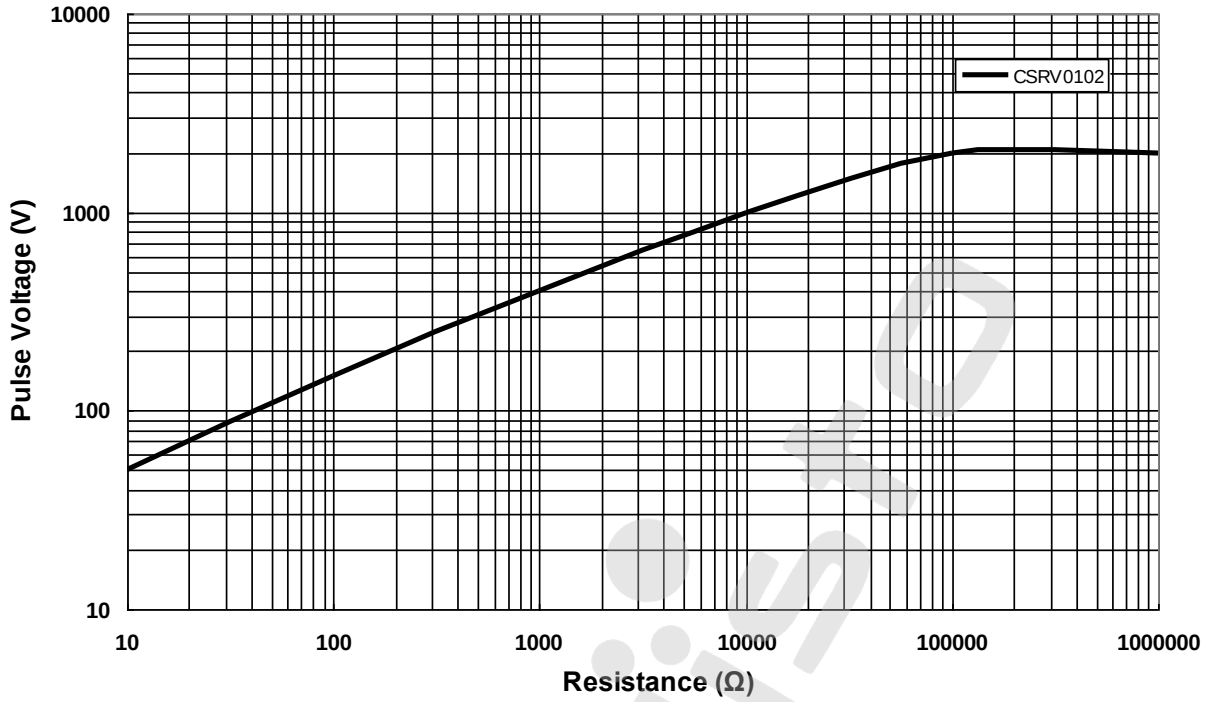


10/700μs Lightning Surge

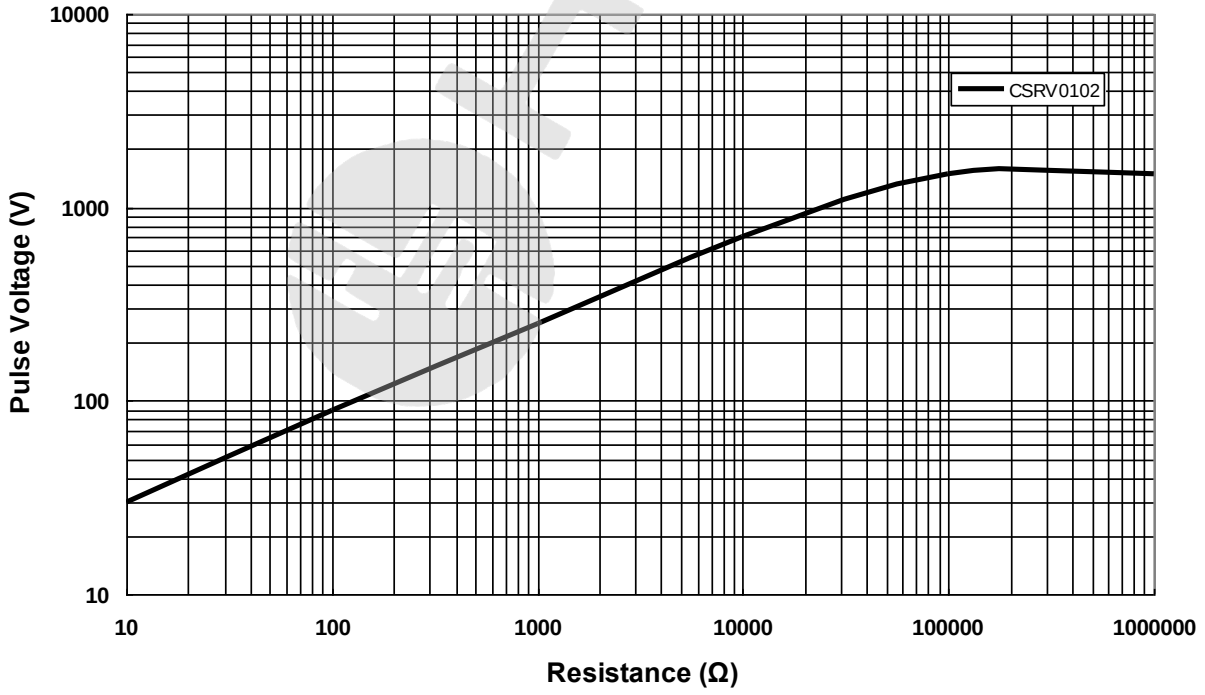

■Marking & Resistance Tolerance

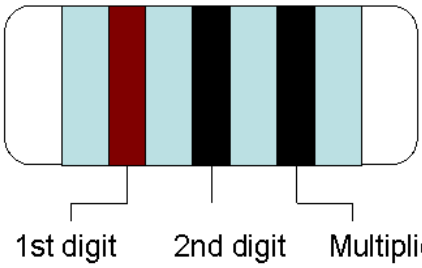

±5%	E-24	1.0	1.1	1.2	1.3	1.5	1.6	1.8	2.0	2.2	2.4	2.7	3.0	3.3	3.6	3.9	4.3	4.7	5.1	5.6	6.2	6.8	7.5	8.2	9.1

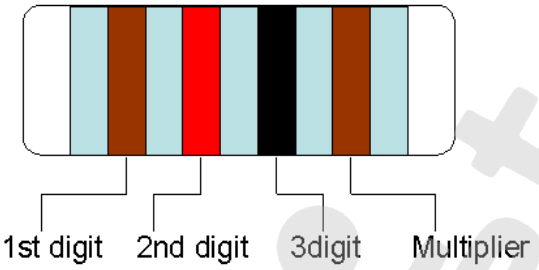

±1%	E-96	1.00	1.02	1.05	1.07	1.10	1.13	1.15	1.18	1.21	1.24	1.27	1.30	1.33	1.37	1.40	1.43	1.47	1.50	1.54	1.58	1.62	1.65	1.69	1.74
		1.78	1.82	1.87	1.91	1.96	2.00	2.05	2.10	2.15	2.21	2.26	2.32	2.37	2.43	2.49	2.55	2.61	2.67	2.74	2.80	2.87	2.94	3.01	3.09
		3.16	3.24	3.32	3.40	3.48	3.57	3.65	3.74	3.83	3.92	4.02	4.12	4.22	4.32	4.42	4.53	4.64	4.75	4.87	4.99	5.11	5.23	5.36	5.49
		5.62	5.76	5.90	6.04	6.19	6.34	6.49	6.65	6.81	6.98	7.15	7.32	7.50	7.68	7.87	8.06	8.25	8.45	8.66	8.87	9.09	9.31	9.53	9.76
±0.5% ±0.25% ±0.1%	E-192	10.0	10.1	10.2	10.4	10.5	10.6	10.7	10.9	11.0	11.1	11.3	11.4	11.5	11.7	11.8	12.0	12.1	12.3	12.4	12.6	12.7	12.9	13.0	13.2
		13.3	13.5	13.7	13.8	14.0	14.2	14.3	14.5	14.7	14.9	15.0	15.2	15.4	15.6	15.8	16.0	16.2	16.4	16.5	16.7	16.9	17.2	17.4	17.6
		17.8	18.0	18.2	18.4	18.7	18.9	19.1	19.3	19.6	19.8	20.0	20.3	20.5	20.8	21.0	21.3	21.5	21.8	22.1	22.3	22.6	22.9	23.2	23.4
		23.7	24.0	24.3	24.6	24.9	25.2	25.5	25.8	26.1	26.4	26.7	27.1	27.4	27.7	28.0	28.4	28.7	29.1	29.4	29.8	30.1	30.5	30.9	31.2
		31.6	32.0	32.4	32.8	33.2	33.6	34.0	34.4	34.8	35.2	35.7	36.1	36.5	37.0	37.4	37.9	38.3	38.8	39.2	39.7	40.2	40.7	41.2	41.7
		42.2	42.7	43.2	43.7	44.2	44.8	45.3	45.9	46.4	47.0	47.5	48.1	48.7	49.3	49.9	50.5	51.1	51.7	52.3	53.0	53.6	54.2	54.9	55.6
		56.2	56.9	57.6	58.3	59.0	59.7	60.4	61.2	61.9	62.6	63.4	64.2	64.9	65.7	66.5	67.3	68.1	69.0	69.8	70.6	71.5	72.3	73.2	74.1
		75.0	75.9	76.8	77.7	78.7	79.6	80.6	81.6	82.5	83.5	84.5	85.6	86.6	87.6	88.7	89.8	90.9	92.0	93.1	94.2	95.3	96.5	97.6	98.8

Color	Digit	Multiplier
Silver	-	10^{-2}
Gold	-	10^{-1}
Black	0	10^{0}
Brown	1	10^{1}
Red	2	10^{2}
Orange	3	10^{3}
Yellow	4	10^{4}
Green	5	10^{5}
Blue	6	10^{6}
Violet	7	10^{7}
Grey	8	10^{8}
White	9	10^{9}

※ Resistance more than two significant figures(<1R) or more than three significant figures(>1R) will not provide color code.

REVISION HISTORY

REVISION	DATE	CHANGE NOTIFICATION	DESCRIPTION
Version A4	Feb 25,2015	-	- Max overload voltage updated - Increase the color code Description
Version A5	Apr 30,2015	-	- Environmental Characteristics updated - Dimension “K” updated
Version A6	Jun 05,2015	-	- Electrical Specifications updated
Version A7	Jul 15, 2016	-	- Size CSRV0102 specifications added - Modify Storage Temperature
Version A8	Mar 06, 2017	-	- Electrical Specifications updated
Version A9	Jun 01, 2017	-	- Electrical Specifications updated
Version B	Aug 04, 2017	-	- Electrical Specifications updated
Version B1	Jan 12, 2018	-	- Electrical Specifications updated - Increase L1 &ΦD1 Dimension
Version B2	Apr 10, 2019	ECN18009	- Electrical Specifications updated - Applications: Automotive(non-safety parts)
Version B3	May 20, 2019	-	- Modify TCR Test description
Version B4	Sep 30, 2019	-	- Modify Pulse withstanding capacity description & picture - Standard Electrical Jumper spec. - 0204 Jumper Specifications 2A-->3A - 0207 Jumper Specifications 4A-->5A
Version B5	Mar 31, 2020	-	- Increase 5ppm specification range
Version B6	Jun 30, 2020	-	- Increase 5ppm specification range
Version B7	16 Sep, 2020	-	- Increase Jumper Specifications
Version B8	10 Mar, 2021	-	- Electrical Specifications updated - Modify Soldering Condition (IPC/JEDEC J-STD-020)
Version B9	28 Sep 2021	-	- Add in Shelf Life: 2 years from production date.
Version C	Jan 05, 2022	-	- Newly added antistatic tape packaging for packaging methods.
Version C1	Feb 15, 2022	-	- Derating Curve changes the temperature range.
Version C2	Jun 15, 2022	-	- Modify Soldering Condition
Version C3	Sep 05, 2023	-	- Features added Thin film technology
Version C4	Apr 16, 2024	-	- Electrical Specifications updated - Environmental Characteristics updated
Version C5	Feb 02, 2026	-	- Electrical Specifications updated